

Single Pole Devices and Temporary Power

Series 16 - 300 and 400A, 600V AC/250V DC

Paralleling Tee

HUBBELL

Ordering Information

Description	Device Color	UPC	Catalog Number
Paralleling "T" Connector (Female-Male-Male)	Black	783585113104	HBLPTBK



Standards


UL 498 and UL1691
UL Enclosure Types 3R, 4X, 12

Specifications

Product Type	Ts" and Tri-Taps
Tee and Tap Type	Paralleling "T" Fitting
Body Material	Thermoplastic Elastomer
Contact Material	Brass

Performance

Electrical	
Amperage Rating	400A Maximum
Voltage Ratings	600V AC Maximum; 250V DC Maximum
Mechanical	
Product Identification	Ratings are a permanent part of the device

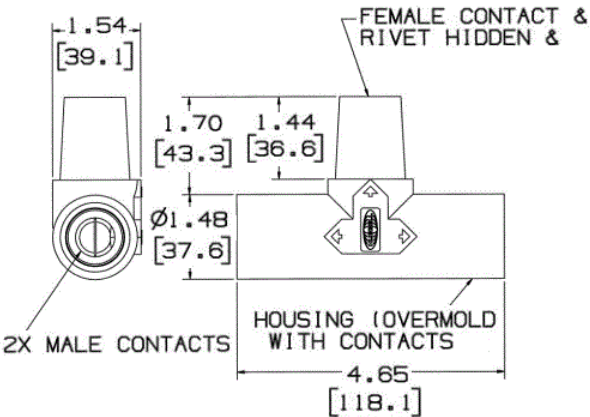

Online Resources

Customer Use Drawing
eCatalog
Installation Instructions



Single Pole Devices and Temporary Power


Series 16 - 300 and 400A, 600V AC/250V DC

Paralleling Tee



Ordering Information

Description	Device Color	UPC	Catalog Number
Paralleling "T" Connector (Female-Male-Male)	Blue	783585113111	HBLPTBL

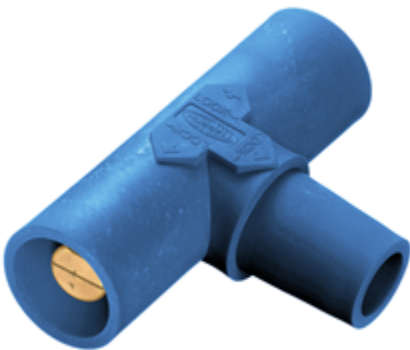

Standards


UL 498 and UL1691
UL Enclosure Types 3R, 4X, 12

Specifications

Product Type	Ts" and Tri-Taps
Tee and Tap Type	Paralleling "T" Fitting
Body Material	Thermoplastic Elastomer
Contact Material	Brass

Performance

Electrical	
Amperage Rating	400A Maximum
Voltage Ratings	600V AC Maximum; 250V DC Maximum
Mechanical	
Product Identification	Ratings are a permanent part of the device

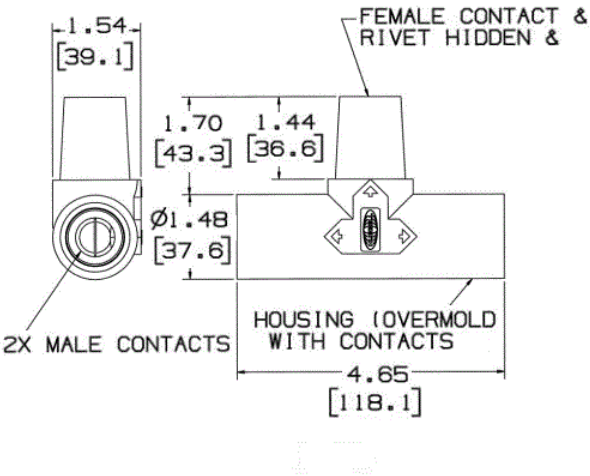

Online Resources

- Customer Use Drawing
- eCatalog
- Installation Instructions



Single Pole Devices and Temporary Power

Series 16 - 300 and 400A, 600V AC/250V DC

Paralleling Tee

HUBBELL

Ordering Information

Description	Device Color	UPC	Catalog Number
Paralleling "T" Connector (Female-Male-Male)	Brown	783585113128	HBLPTBN



Standards


UL 498 and UL1691
UL Enclosure Types 3R, 4X, 12

Specifications

Product Type	Ts" and Tri-Taps
Tee and Tap Type	Paralleling "T" Fitting
Body Material	Thermoplastic Elastomer
Contact Material	Brass

Performance

Electrical	
Amperage Rating	400A Maximum
Voltage Ratings	600V AC Maximum; 250V DC Maximum
Mechanical	
Product Identification	Ratings are a permanent part of the device

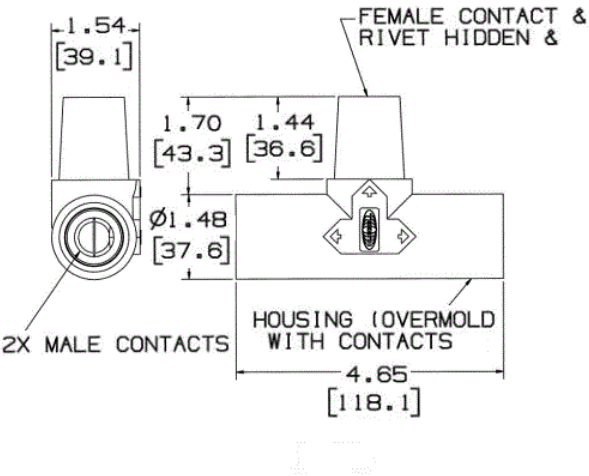

Online Resources

- Customer Use Drawing
- eCatalog
- Installation Instructions



Single Pole Devices and Temporary Power

Series 16 - 300 and 400A, 600V AC/250V DC

Paralleling Tee

HUBBELL

Ordering Information

Description	Device Color	UPC	Catalog Number
Paralleling "T" Connector (Female-Male-Male)	Green	783585113135	HBLPTGN



Standards


UL 498 and UL1691
UL Enclosure Types 3R, 4X, 12

Specifications

Product Type	Ts" and Tri-Taps
Tee and Tap Type	Paralleling "T" Fitting
Body Material	Thermoplastic Elastomer
Contact Material	Brass

Performance

Electrical	
Amperage Rating	400A Maximum
Voltage Ratings	600V AC Maximum; 250V DC Maximum
Mechanical	
Product Identification	Ratings are a permanent part of the device

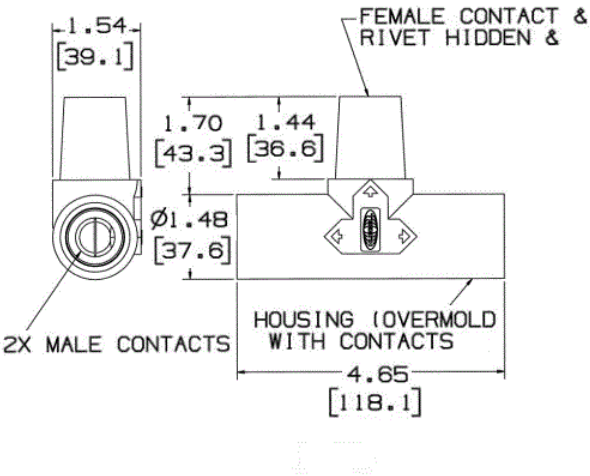

Online Resources

- Customer Use Drawing
- eCatalog
- Installation Instructions



Single Pole Devices and Temporary Power

Series 16 - 300 and 400A, 600V AC/250V DC

Paralleling Tee



Ordering Information

Description	Device Color	UPC	Catalog Number
Paralleling "T" Connector (Female-Male-Male)	Orange	783585113142	HBLPTO



Standards


UL 498 and UL1691
UL Enclosure Types 3R, 4X, 12

Specifications

Product Type	Ts" and Tri-Taps
Tee and Tap Type	Paralleling "T" Fitting
Body Material	Thermoplastic Elastomer
Contact Material	Brass

Performance

Electrical	
Amperage Rating	400A Maximum
Voltage Ratings	600V AC Maximum; 250V DC Maximum
Mechanical	
Product Identification	Ratings are a permanent part of the device

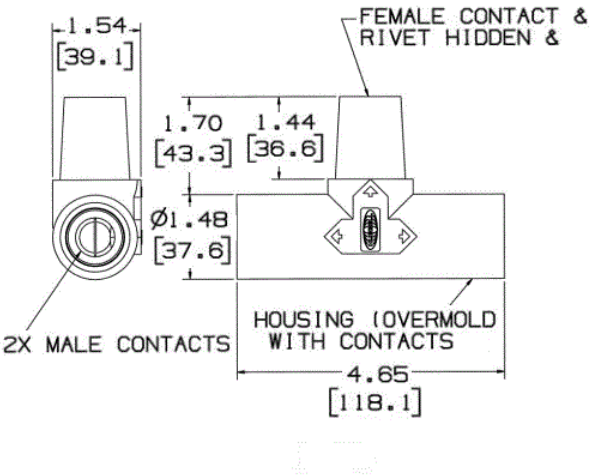

Online Resources

- Customer Use Drawing
- eCatalog
- Installation Instructions



Single Pole Devices and Temporary Power

Series 16 - 300 and 400A, 600V AC/250V DC

Paralleling Tee

HUBBELL

Ordering Information

Description	Device Color	UPC	Catalog Number
Paralleling "T" Connector (Female-Male-Male)	Red	783585113159	HBLPTR



Standards


UL 498 and UL1691
UL Enclosure Types 3R, 4X, 12

Specifications

Product Type	Ts" and Tri-Taps
Tee and Tap Type	Paralleling "T" Fitting
Body Material	Thermoplastic Elastomer
Contact Material	Brass

Performance

Electrical	
Amperage Rating	400A Maximum
Voltage Ratings	600V AC Maximum; 250V DC Maximum
Mechanical	
Product Identification	Ratings are a permanent part of the device

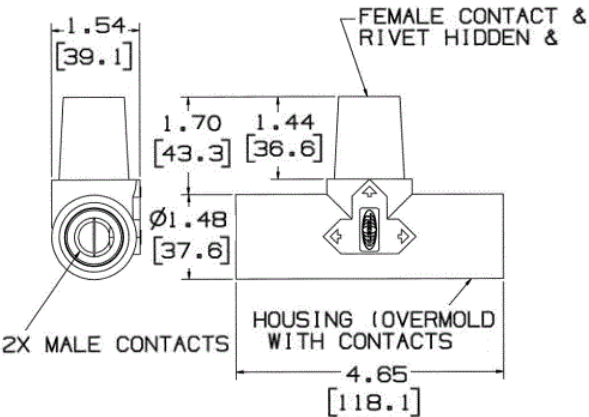

Online Resources

- Customer Use Drawing
- eCatalog
- Installation Instructions



Single Pole Devices and Temporary Power

Series 16 - 300 and 400A, 600V AC/250V DC

Paralleling Tee

HUBBELL

Ordering Information

Description	Device Color	UPC	Catalog Number
Paralleling "T" Connector (Female-Male-Male)	White	783585113166	HBLPTW



Standards


UL 498 and UL1691
UL Enclosure Types 3R, 4X, 12

Specifications

Product Type	Ts" and Tri-Taps
Tee and Tap Type	Paralleling "T" Fitting
Body Material	Thermoplastic Elastomer
Contact Material	Brass

Performance

Electrical	
Amperage Rating	400A Maximum
Voltage Ratings	600V AC Maximum; 250V DC Maximum
Mechanical	
Product Identification	Ratings are a permanent part of the device

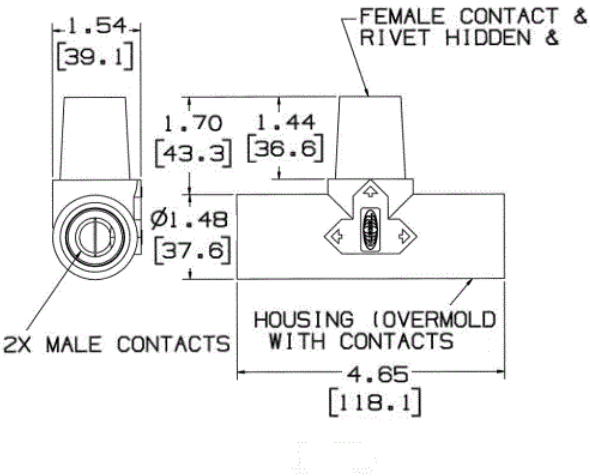

Online Resources

- Customer Use Drawing
- eCatalog
- Installation Instructions



Single Pole Devices and Temporary Power

Series 16 - 300 and 400A, 600V AC/250V DC

Paralleling Tee

HUBBELL

Ordering Information

Description	Device Color	UPC	Catalog Number
Paralleling "T" Connector (Female-Male-Male)	Yellow	783585113173	HBLPTY



Standards


UL 498 and UL1691
UL Enclosure Types 3R, 4X, 12

Specifications

Product Type	Ts" and Tri-Taps
Tee and Tap Type	Paralleling "T" Fitting
Body Material	Thermoplastic Elastomer
Contact Material	Brass

Performance

Electrical	
Amperage Rating	400A Maximum
Voltage Ratings	600V AC Maximum; 250V DC Maximum
Mechanical	
Product Identification	Ratings are a permanent part of the device

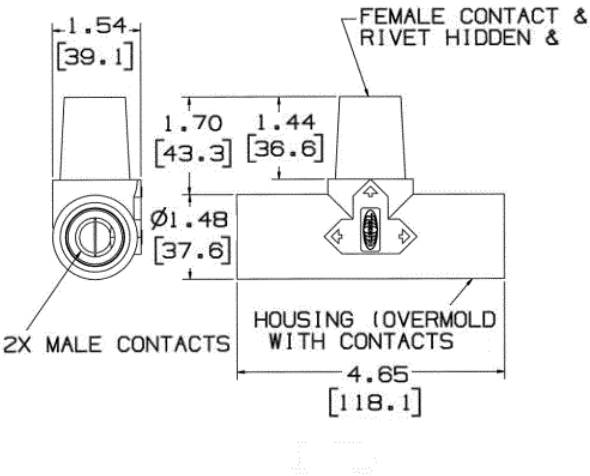

Online Resources

- Customer Use Drawing
- eCatalog
- Installation Instructions

