

Single Pole Devices and Temporary Power

Series 16 - 300 and 400A, 600V AC/250V DC

Tapping Tee

HUBBELL

Ordering Information

Description	Device Color	UPC	Catalog Number
Tapping "T" Connector (Female-Female-Male)	Black	783585046525	HBLTBK




Standards

UL 498 and UL1691  
UL Enclosure Types 3R, 4X, 12

Specifications

Product Type	Ts" and Tri-Taps
Tee and Tap Type	"T" Fitting
Body Material	Thermoplastic Elastomer
Contact Material	Brass

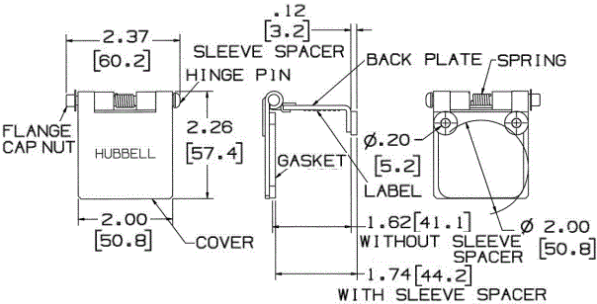

Performance

Electrical	
Amperage Rating	400A Maximum
Voltage Ratings	600V AC Maximum; 250V DC Maximum

Mechanical	
Product Identification	Ratings are a permanent part of the device

Online Resources

Customer Use Drawing  
eCatalog  
Installation Instructions



Single Pole Devices and Temporary Power

Series 16 - 300 and 400A, 600V AC/250V DC

Tapping Tee

HUBBELL

Ordering Information

Description	Device Color	UPC	Catalog Number
Tapping "T" Connector (Female-Female-Male)	Blue	783585174181	HBLTBL




Standards

UL 498 and UL1691  
UL Enclosure Types 3R, 4X, 12

Specifications

Product Type	Ts" and Tri-Taps
Tee and Tap Type	"T" Fitting
Body Material	Thermoplastic Elastomer
Contact Material	Brass

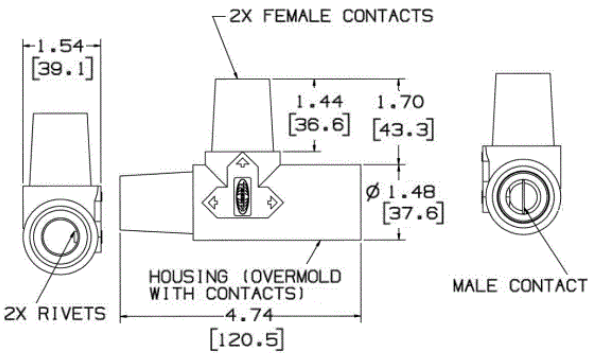

Performance

Electrical	
Amperage Rating	400A Maximum
Voltage Ratings	600V AC Maximum; 250V DC Maximum
Mechanical	
Product Identification	Ratings are a permanent part of the device

Online Resources

Customer Use Drawing  
eCatalog  
Installation Instructions



Single Pole Devices and Temporary Power

Series 16 - 300 and 400A, 600V AC/250V DC

Tapping Tee

HUBBELL

Ordering Information

Description	Device Color	UPC	Catalog Number
Tapping "T" Connector (Female-Female-Male)	Brown	783585113180	HBLTBN




Standards

UL 498 and UL1691  
UL Enclosure Types 3R, 4X, 12

Specifications

Product Type	Ts" and Tri-Taps
Tee and Tap Type	"T" Fitting
Body Material	Thermoplastic Elastomer
Contact Material	Brass

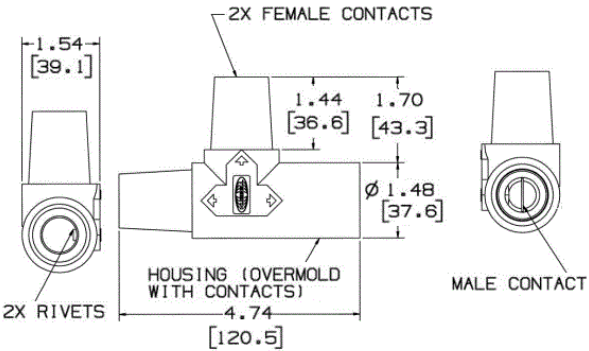

Performance

<b>Electrical</b>	
Amperage Rating	400A Maximum
Voltage Ratings	600V AC Maximum; 250V DC Maximum
<b>Mechanical</b>	
Product Identification	Ratings are a permanent part of the device

Online Resources

Customer Use Drawing  
eCatalog  
Installation Instructions



Single Pole Devices and Temporary Power

Series 16 - 300 and 400A, 600V AC/250V DC

Tapping Tee

HUBBELL

Ordering Information

Description	Device Color	UPC	Catalog Number
Tapping "T" Connector (Female-Female-Male)	Green	783585174204	HBLTGN




Standards

UL 498 and UL1691  
UL Enclosure Types 3R, 4X, 12

Specifications

Product Type	Ts" and Tri-Taps
Tee and Tap Type	"T" Fitting
Body Material	Thermoplastic Elastomer
Contact Material	Brass

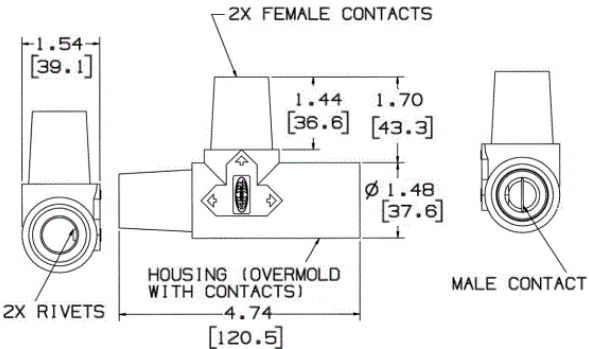

Performance

Electrical	
Amperage Rating	400A Maximum
Voltage Ratings	600V AC Maximum; 250V DC Maximum

Mechanical	
Product Identification	Ratings are a permanent part of the device

Online Resources

- Customer Use Drawing
- eCatalog
- Installation Instructions



Single Pole Devices and Temporary Power

Series 16 - 300 and 400A, 600V AC/250V DC

Tapping Tee

HUBBELL

Ordering Information

Description	Device Color	UPC	Catalog Number
Tapping "T" Connector (Female-Female-Male)	Orange	783585113197	HBLTO




Standards

UL 498 and UL1691  
UL Enclosure Types 3R, 4X, 12

Specifications

Product Type	Ts" and Tri-Taps
Tee and Tap Type	"T" Fitting
Body Material	Thermoplastic Elastomer
Contact Material	Brass

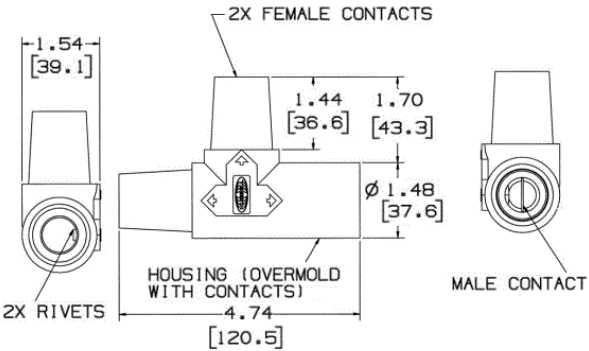

Performance

<b>Electrical</b>	
Amperage Rating	400A Maximum
Voltage Ratings	600V AC Maximum; 250V DC Maximum
<b>Mechanical</b>	
Product Identification	Ratings are a permanent part of the device

Online Resources

Customer Use Drawing  
eCatalog  
Installation Instructions



Single Pole Devices and Temporary Power

Series 16 - 300 and 400A, 600V AC/250V DC

Tapping Tee

HUBBELL

Ordering Information

Description	Device Color	UPC	Catalog Number
Tapping "T" Connector (Female-Female-Male)	Red	783585174174	HBLTR




Standards

UL 498 and UL1691  
UL Enclosure Types 3R, 4X, 12

Specifications

Product Type	Ts" and Tri-Taps
Tee and Tap Type	"T" Fitting
Body Material	Thermoplastic Elastomer
Contact Material	Brass

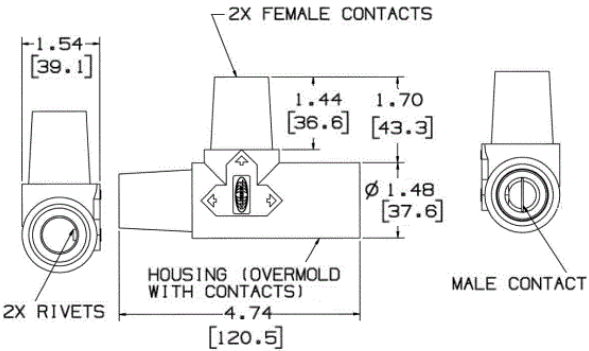

Performance

<b>Electrical</b>	
Amperage Rating	400A Maximum
Voltage Ratings	600V AC Maximum; 250V DC Maximum
<b>Mechanical</b>	
Product Identification	Ratings are a permanent part of the device

Online Resources

Customer Use Drawing  
eCatalog  
Installation Instructions



Single Pole Devices and Temporary Power

Series 16 - 300 and 400A, 600V AC/250V DC

Tapping Tee

HUBBELL

Ordering Information

Description	Device Color	UPC	Catalog Number
Tapping "T" Connector (Female-Female-Male)	White	783585174198	HBLTW




Standards

UL 498 and UL1691  
UL Enclosure Types 3R, 4X, 12

Specifications

Product Type	Ts" and Tri-Taps
Tee and Tap Type	"T" Fitting
Body Material	Thermoplastic Elastomer
Contact Material	Brass

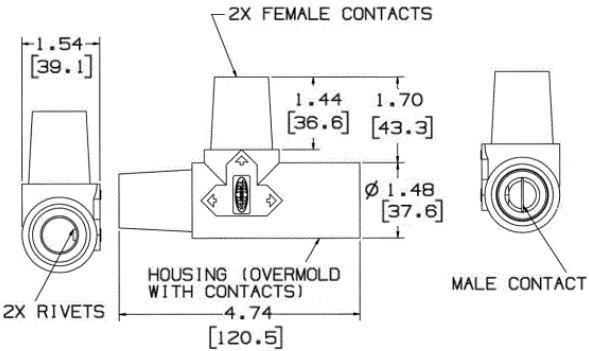

Performance

Electrical	
Amperage Rating	400A Maximum
Voltage Ratings	600V AC Maximum; 250V DC Maximum
Mechanical	
Product Identification	Ratings are a permanent part of the device

Online Resources

- Customer Use Drawing
- eCatalog
- Installation Instructions



Single Pole Devices and Temporary Power

Series 16 - 300 and 400A, 600V AC/250V DC

Tapping Tee

HUBBELL

Ordering Information

Description	Device Color	UPC	Catalog Number
Tapping "T" Connector (Female-Female-Male)	Yellow	783585113203	HBLTY




Standards

UL 498 and UL1691  
UL Enclosure Types 3R, 4X, 12

Specifications

Product Type	Ts" and Tri-Taps
Tee and Tap Type	"T" Fitting
Body Material	Thermoplastic Elastomer
Contact Material	Brass

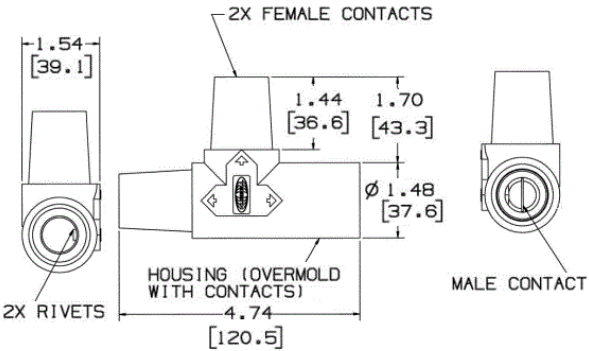

Performance

<b>Electrical</b>	
Amperage Rating	400A Maximum
Voltage Ratings	600V AC Maximum; 250V DC Maximum
<b>Mechanical</b>	
Product Identification	Ratings are a permanent part of the device

Online Resources

Customer Use Drawing  
eCatalog  
Installation Instructions

