

Single Pole Devices and Temporary Power

50A, 120/240V AC

Spider® II Temporary Power Boxes



Features

- Individual GFCI modules
- TYPE 3R metallic enclosure and heavy duty,abuse resistant legs
- Standard stab termination circuit breakers with gasketed lift cover

Ordering Information

Description	Product Type	UPC	Catalog Number
Spider Box, 50A, Straight Blade	Spider II Boxes	783585369471	SBSB2

Standards

UL 1640 cUL and CSA, UL 943

Specifications


Enclosure Type	3R, rainproof, suitable for use in damp locations
Code Compliance	NEC®, ANSI/NFPA 70

Performance

Environment	
Moisture Resistance	Indoor and outdoor wet and dry locations

Online Resources

Customer Use Drawing
eCatalog
Installation Instructions

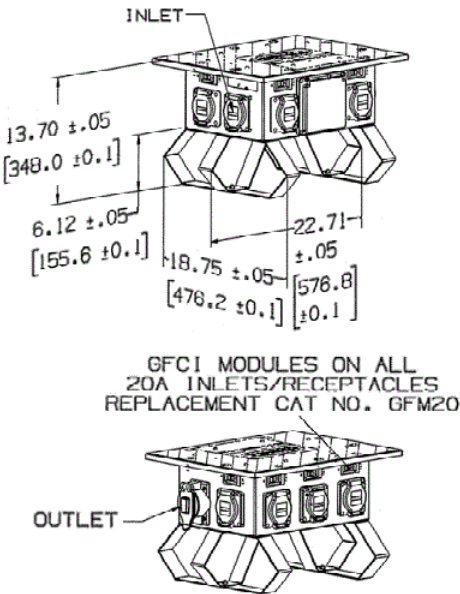

Single Pole Devices and Temporary Power

50A, 120/240V AC

Spider® II Temporary Power Boxes



Features

- Individual GFCI modules
- TYPE 3R metallic enclosure and heavy duty, abuse resistant legs
- Standard stab termination circuit breakers with gasketed lift cover

Ordering Information

Description	Product Type	UPC	Catalog Number
Spider Box, 50A, Twist Lock	Spider II Boxes	783585369518	SBTL2

Standards

UL 1640 cUL and CSA, UL 943

Specifications

Enclosure Type	3R, rainproof, suitable for use in damp locations
Code Compliance	NEC®, ANSI/NFPA 70

Performance

Environment

Moisture Resistance	Indoor and outdoor wet and dry locations
---------------------	--

Online Resources

- Customer Use Drawing
- eCatalog
- Installation Instructions

