

Single Pole Devices and Temporary Power

60A, 3Phase 120/208V AC

Spider® II Temporary Power Boxes



- Features
- Individual GFCI modules
 - TYPE 3R metallic enclosure and heavy duty,abuse resistant legs
 - Standard stab termination circuit breakers with gasketed lift cover



Ordering Information

Description	Product Type	UPC	Catalog Number
Spider Box, 60A, Straight Blade	Spider II Boxes	783585075617	SCSB0

Standards

UL and cUL Listed

Specifications


Enclosure Type	3R, rainproof, suitable for use in damp locations
Code Compliance	NEC®, ANSI/NFPA 70

Performance

Environment	
Moisture Resistance	Indoor and outdoor wet and dry locations

Online Resources

- Customer Use Drawing
- eCatalog
- Installation Instructions

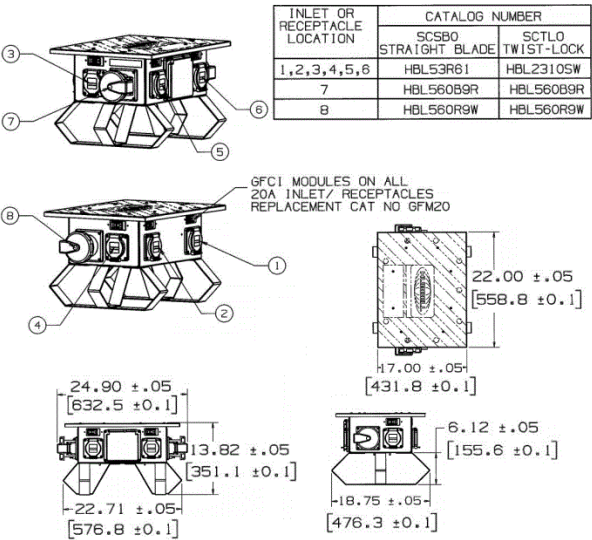

Single Pole Devices and Temporary Power

60A, 3Phase 120/208V AC

Spider® II Temporary Power Boxes



Features

- Individual GFCI modules
- TYPE 3R metallic enclosure and heavy duty, abuse resistant legs
- Standard stab termination circuit breakers with gasketed lift cover

Ordering Information

Description	Product Type	UPC	Catalog Number
Spider Box, 60A, Twist Lock	Spider II Boxes	783585940014	SCTL0

Standards

UL and cUL Listed

Specifications

Enclosure Type	3R, rainproof, suitable for use in damp locations
Code Compliance	NEC®, ANSI/NFPA 70

Performance

Environment

Moisture Resistance Indoor and outdoor wet and dry locations

Online Resources

- Customer Use Drawing
- eCatalog
- Installation Instructions

