
	8	7		6	5	↓ 4	1	3		
		•	•				Z	ZONE	REV	DESCF
									1	PRELIM
D									Г	5 1]
									Ĺ	51] 2.0
										2.0
							¥			
							2.0			
	[355] 14.0						I		[:	3.5.5
									1	355] I 4.0
					\sim					
С										
			Г	· 1						
			l	915] 36.0						
		•		36.0						

Technical Data Sheet - MG1200							
Description	Imperial	Metric					
Product - Length x Width x Height	36 x 14 x 2.5	915 x 355 x 63					
Channel Size	2 x 2	51 x 51					
Product Weight (lbs)	23	10.4					
Load Capacity (lbs/axle)	38,000	17,235					
Operating Temperature	-20°F up to +140°F	-30°C up to +60°C					
Measurements are approximate	Imperial = inches & Ibs.	Metric = mm & kg.					

Standard Colors - Black Base/Orange Lid Material - Polyurethane Duromater - 90 Shore A Base +/- 5 --- 55D Shore D Lid +/-5 Manufacture in USA

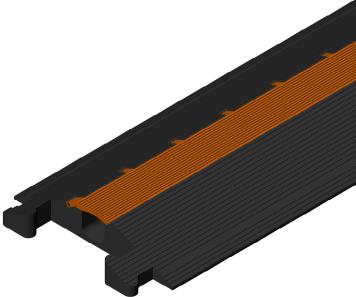

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF THE ESAC. ANY REPRODUCTION IN PART OR AS A WHOLEWITHOUT THE WRITTEN PERMISSION OF THE ELASCO IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED DIMENSIONS AND TOLERANCES PER ASME Y14.5M

3

8

В

А

7

6

5

Ť

4

I	2	I]	
DES	CRIPTION			APPROVAL	1
	IMINARY RELEASE	1/4/20		CN	
_					
					D
51]	1				
2.0	T [63]				
г					
355]					
14.0					
					C
					-
					В
	1				
	UNLESS OTHERWISE SPECIFIED:	Elas	co Prod	ucts, LLC	
AINED IN PROPERTY DUCTION	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL <u>+</u> 1/32			do Circle ch, CA 92648	
WITHOUT		τι Γ.		GUARD	1
	$.XX = \pm .01$ $.XXX = \pm .005$			el at 2.0"	
ECIFIED		SIZE DWG. N	\cap	REV	1
RANCES	CHECKED:	B	MG	1200 1	
i	APPROVED: ELECTRONIC SIGNATURE ON FILE	SCALE: 1:6		SHEET 1 OF 1	
	2	I		1	