

Twist-Lock® Devices
50A, 125/250V AC, 3 Pole, 4 Wire Grounding
Receptacle

HUBBELL

Features

- Thermoset construction offers high heat resistance
- Armored housing provides superior impact resistance
- One piece contacts provide low operating temperatures

Ordering Information

Description	Device Color	UPC	Catalog Number
Phenolic	Black	783585828107	CS6369

Listings

Listed to UL 498
Certified to CSA C22.2 No.42

Specifications

Body	Phenolic
Face	Phenolic
Contacts	Brass
Terminal Screws	Steel
Insulator	Phenolic

Performance

Electrical


Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum

Mechanical

Terminal Accommodation	#10 AWG - #6 AWG solid or stranded copper wire only
------------------------	---

Environmental

Flammability	UL 94 V0
Operating Temperatures	Maximum continuous 75°C; minimum -40°C (w/o impact)

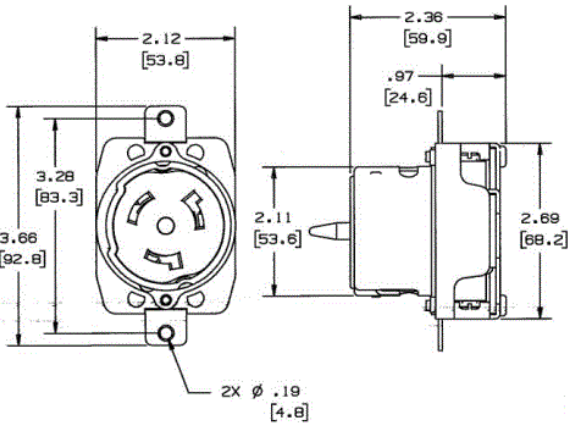

Accessories

Plug	CS6365C
Weatherproof Lift Cover	HBL7774WO
Single Gang Stainless Steel Wallplate	SS750
4" Square Raised Cover	HBL50SC

Resources

Customer Use Drawing
eCatalog



Twist-Lock® Devices
50A, 3 Phase 480V AC, 3 Pole, 4 Wire
Grounding
Receptacle

HUBBELL

Features

- Thermoset construction offers high heat resistance
- Armored housing provides superior impact resistance
- One piece contacts provide low operating temperatures

Ordering Information

Description	Device Color	UPC	Catalog Number
Phenolic	Black	783585828503	CS8169

Listings

Listed to UL 498
Certified to CSA C22.2 No.42

Specifications


Body	Phenolic
Face	Phenolic
Contacts	Brass
Terminal Screws	Steel
Insulator	Phenolic

Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum

Mechanical	
Terminal Accommodation	#10 AWG - #6 AWG solid or stranded copper wire only

Environmental	
Flammability	UL 94 V0
Operating Temperatures	Maximum continuous 75°C; minimum -40°C (w/o impact)

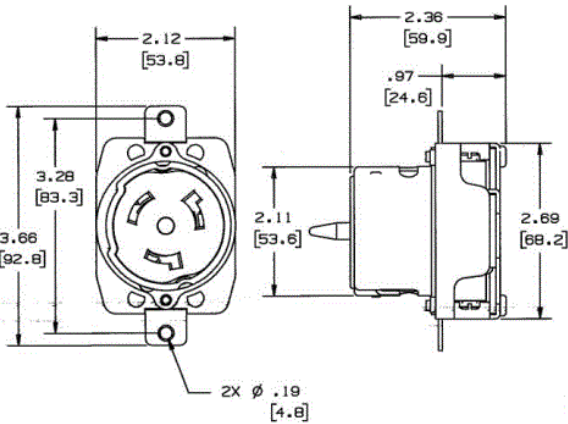

Accessories

Plug	CS8165C
Weatherproof Lift Cover	HBL7774WO
Single Gang Stainless Steel Wallplate	SS750
4" Square Raised Cover	HBL50SC

Resources

Customer Use Drawing
eCatalog



Twist-Lock® Devices
50A, 3 Phase 250V AC, 3 Pole, 4 Wire
Grounding
Receptacle

HUBBELL

Features

- Thermoset construction offers high heat resistance
- Armored housing provides superior impact resistance
- One piece contacts provide low operating temperatures

Ordering Information

Description Phenolic	Device Color Black	UPC 783585829074	Catalog Number CS8369
-------------------------	-----------------------	---------------------	--------------------------

Listings

Listed to UL 498
Certified to CSA C22.2 No.42

Specifications


Body	Phenolic
Face	Phenolic
Contacts	Brass
Terminal Screws	Steel
Insulator	Phenolic

Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum

Mechanical	
Terminal Accommodation	#10 AWG - #6 AWG solid or stranded copper wire only

Environmental	
Flammability	UL 94 V0
Operating Temperatures	Maximum continuous 75°C; minimum -40°C (w/o impact)

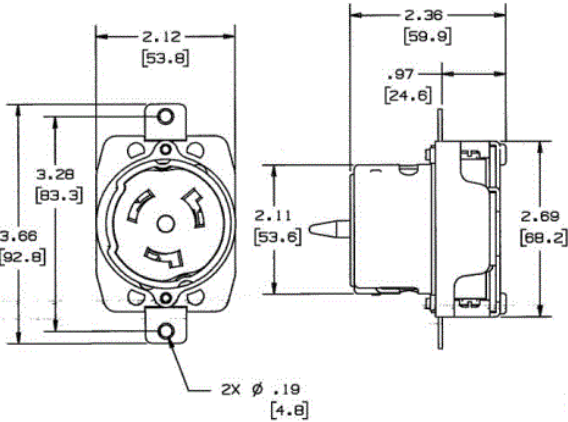

Accessories

Plug	CS835C
Weatherproof Lift Cover	HBL7774WO
Single Gang Stainless Steel Wallplate	SS750
4" Square Raised Cover	HBL50SC

Resources

Customer Use Drawing
eCatalog

