



INNOVATIVE POWER SOLUTIONS

CABLE ASSEMBLIES

POWER DISTRIBUTION

CONTROLS

WWW.POWERASSEMBLIES.COM

• LAS VEGAS, NV • BEND, OR • POMPANO BEACH, FL •

TYPE W PIGTAILS

PRODUCT SPECIFICATIONS

OVERVIEW

Cable end opposite of CAM can be blunt, tinned, or with a standard 1/2" hole, long barrel lug. Optional custom labeling or cable print is available. Black shrink tube is added to the lug connection for a cleaner look and water resistance.



FLORIDA
(866)825-8525
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



LAS VEGAS
(877)597-5787
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



CABLE SPECIFICATIONS

TYPE W

TECHNICAL DATA

Temperature Rating: 90°C

Voltage: 2000V

AWG: #8-250

Conductors: 1

APPLICATIONS

Portable Power Systems

Entertainment Industry

Lighting & Sound Systems

Mobile Communication

Temporary Power



CHEMICAL &
ACID RESISTANT



SEVERE
CONDITION
RESISTANT



INDENT
PRINTED



MOISTURE & OIL
RESISTANT



UV
RESISTANT



HEAT & FLAME
RESISTANT



FLORIDA
(866)825-8525
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



LAS VEGAS
(877)597-5787
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



COMPONENT SPECIFICATIONS

SERIES 16 CAMLOCK





TECHNICAL DATA

Series: 16
AWG: 2/0 - 4/0
Amperage Rating: 400A
Voltage Rating: 600V
Max Temperature Rating: 105°C
Double Set Screw

MATERIAL

Insulating Sleeve: Plastic
Contacts: Gold Plated
Locking Rings: Rubber Coated

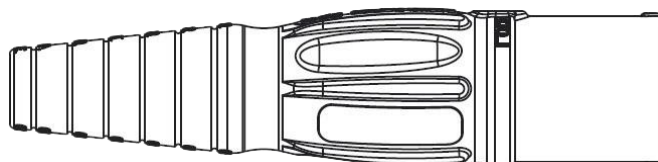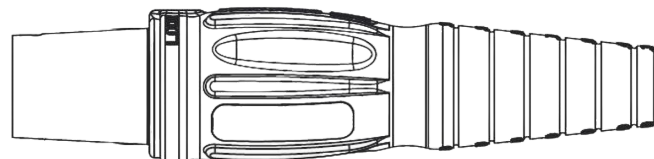

FLORIDA
(866)825-8525
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



LAS VEGAS
(877)597-5787
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM

