

GP15000E

GP SERIES Commercial/Residential Portable Generators

Features


Model 5734-1 UPC: 696471057348
(EPA/49-ST)

- **The Generac OHVI® engine** incorporates full pressure lubrication with automotive style spin on oil filter for longer life engine.
- **Idle control** reduces noise and conserves fuel for extended run-times.
- **Hour meter** tracks maintenance intervals.
- **Large-capacity fuel tank** with incorporated fuel gauge provides durability and extended run times.
- **Low-oil pressure shutdown** automatically safeguards engine from damage.
- **Hardened 1 1/4" steel tube cradle** for added durability and strength.
- **Integrated lifting eye** for easy transport and security on the job site.



AC Rated Output Running Watts 15000
AC Maximum Output Starting Watts 22500

49-State Control Panel

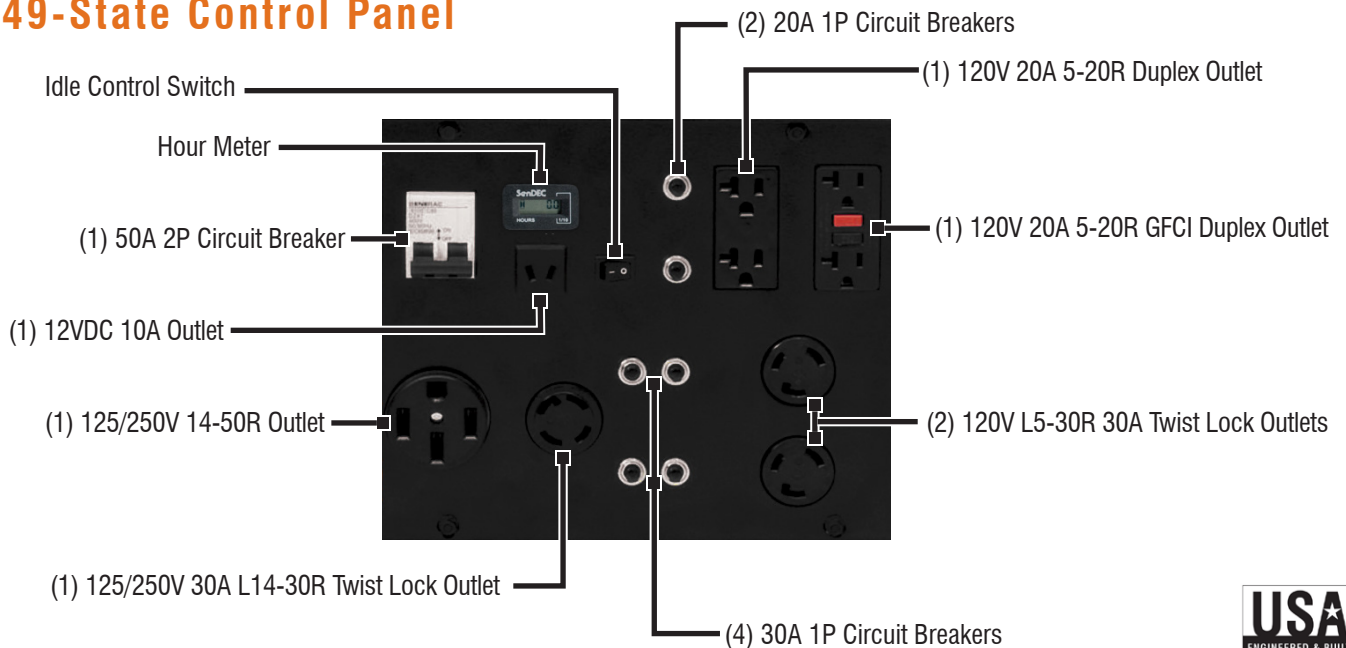

GP15000E



specifications

| | |
|---|-----------------------|
| Product Series | GP15000E |
| Model (Configuration) | 5734-1 (EPA/49-State) |
| AC Rated Output Running Watts: | 15000 |
| AC Maximum Output Motor Starting Watts: | 22500 |
| AC Voltage | 120/240 VAC |
| AC Frequency | 60 Hz |
| Rated VAC Amperage | 125/62.5 |
| Max Rated VAC Amperage | 187.8/93.75 |
| Engine Displacement | 992cc |
| Engine Type | OHVI |
| Engine RPM | 3600 |
| Recommended Oil | 10W-30 / SAE30 |
| Lubrication Method | Oil Pump |
| Automatic Voltage Regulation (AVR) | Yes |
| Oil Filter | Yes - Spin On |
| Choke Location | On Engine |
| Fuel Shut Off | On Fuel Tank |
| Starting Method | Electric |
| Low Oil Shutdown Method | Low Pressure |
| Battery Type | Group U1, 360 CCA |
| Neutral Bonded to Ground | No - Floating Neutral |

| | |
|------------------------------|--|
| Start Switch Type | On/Off/Start Switch |
| Switch Location | On Engine |
| Fuel Gauge | Built-In Tank |
| Fuel Tank Capacity Gal (Ltr) | 16 (60.6) |
| Fuel Filter | Yes |
| Run Time at 50% (Hours) | 10 |
| Handle Style | Fixed |
| Wheel Type | 12.3 Pneumatic Wheels |
| Warranty - Residential | 2 Year Ltd |
| Warranty - Commercial | 1 Year Ltd |
| Maintenance Kit | Included - Model 5721 - Air Filter - Oil Filter - (2) Spark Plugs - Oil Funnel - Chamois - Stabil Sample |

Dimensions and Weights

| | |
|--------------------------|-------------|
| Length in (mm) | 48.5 (1232) |
| Width in (mm) | 31 (787) |
| Height in (mm) | 39.5 (1003) |
| Carton Length in (mm) | 49 (1245) |
| Carton Width in (mm) | 23.25 (592) |
| Carton Height in (mm) | 35.5 (902) |
| Unit Weight lbs (kg) | 363 (165) |
| Shipping Weight lbs (kg) | 425 (193) |

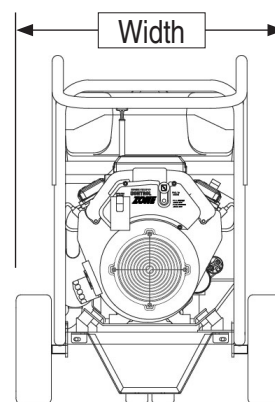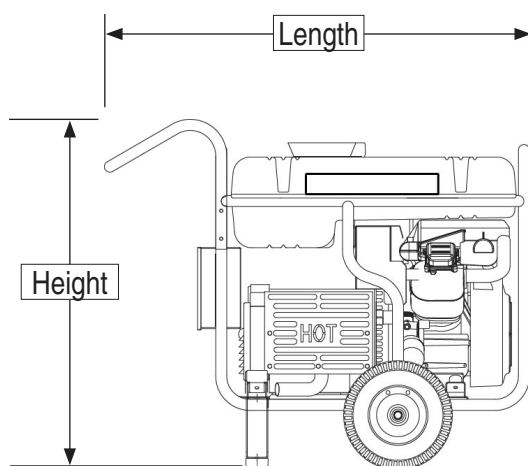
GENERAC®

Generac Power Systems, Inc. • P.O. Box 8, Waukesha, WI 53187 • generac.com

©2013 Generac Power Systems, Inc. All rights reserved. All specifications are subject to change without notice. Bulletin 0196650-A / Printed in U.S.A. 09/19/13

GP17500E

GP SERIES Commercial/Residential Portable Generators

1 of 2

Model 5735-2 UPC: 696471057355
(EPA/49-State)


Features

- The **Generac OHVI® engine** incorporates full pressure lubrication with automotive style spin on oil filter for longer life engine.
- **Low-oil pressure shutdown** automatically safeguards engine from damage.
- **Large-capacity fuel tank** with incorporated fuel gauge provides durability and extended run times.
- **Hardened 1 1/4" steel tube cradle** for added strength and durability.
- **Hour Meter** tracks maintenance intervals.
- **Heavy-duty, pneumatic wheels** for reliable portability.
- **Electric Start**, battery included, provides hassle-free start-up.
- **Idle control** reduces noise and conserves fuel for extended run-times.
- **Integrated lifting eye** for easy transport and security on the job site.



AC Rated Output Running Watts 17500
AC Maximum Output Starting Watts 26250

49-State Control Panel

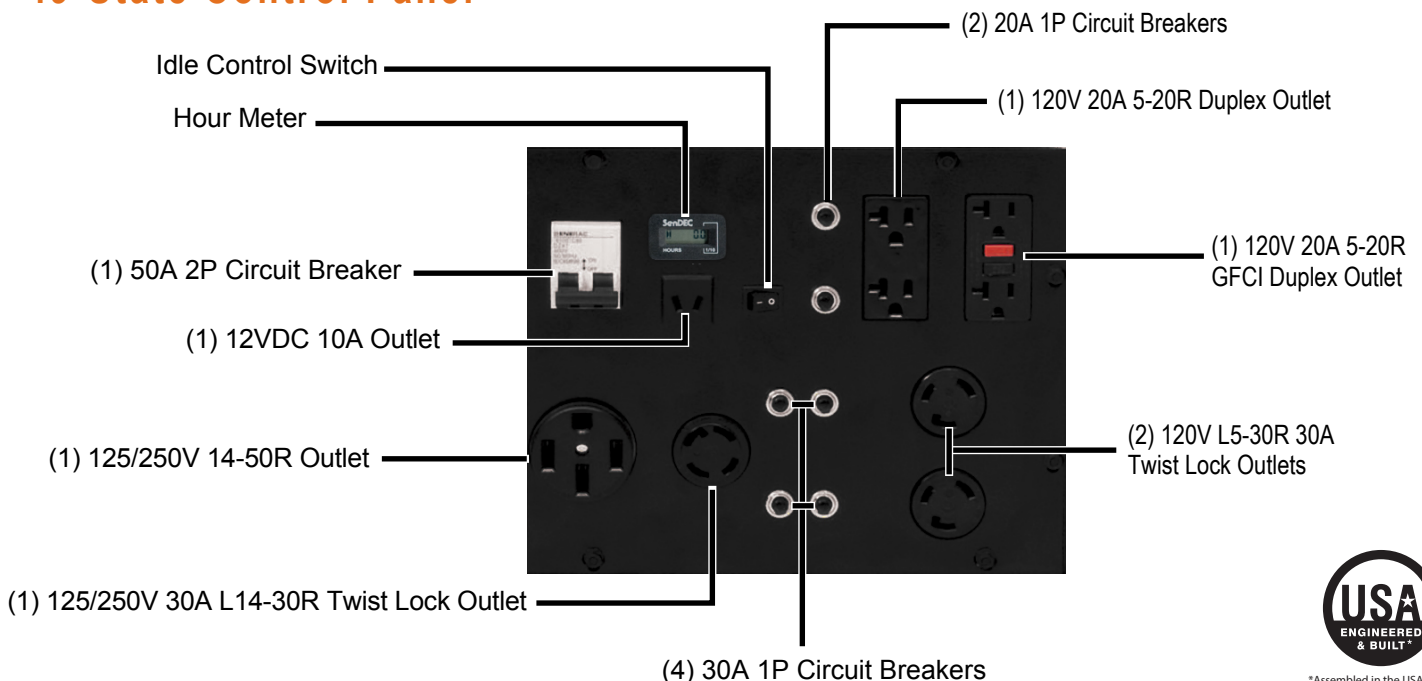

*Assembled in the USA using domestic and foreign parts

GP17500E



Specifications

| | |
|--|---|
| Product Series | GP17500E |
| Model (Configuration) | 5735-2 (EPA/49-State) |
| AC Rated Output Running Watts | 17500 |
| AC Maximum Output Motor Starting Watts | 26250 |
| Rated AC Voltage | 120/240 VAC |
| Rated AC Frequency | 60 Hz |
| Rated VAC Amperage | 145.8 /72.9 |
| Engine Displacement | 992cc |
| Engine Type | OHVI |
| Engine RPM | 3600 |
| Recommended Oil | 10W-30 / SAE30 |
| Oil Capacity qt (L) | w/ Filter Change: 1.7 (1.6) w/o Filter Change: 1.4 (1.3) |
| Lubrication Method | Oil Pump |
| Automatic Voltage Regulation (AVR) | Yes |
| Choke Location | On Engine |
| Fuel Shut Off | On Fuel Tank |
| Starting Method | Electric |
| Low Oil Shutdown Method | Low Pressure |

| | |
|-------------------------------|---|
| Battery Included | Yes |
| Battery Type | Group U1 |
| Battery Part No. | N/A (Replacement batteries must be purchased locally) |
| Battery Dimensions | Group U1 has a standard case size |
| Battery Charger Input Jack | Included |
| Neutral Bonded to Ground | Yes - Neutral Bonded to Frame |
| Start Switch Type | Off/Run/Start Switch |
| Switch Location | On Engine |
| Fuel Gauge | Built-In Tank |
| Fuel Tank Capacity Gal (Ltrs) | 16 (60.6) |
| Run Time at 50% (Hours) | 10 |
| Handle Style | Fixed |
| Wheel Type | 12.3 Pneumatic Wheels |
| Maintenance Kit | Included |
| Warranty- Residential | 2 Year Limited |
| Warranty- Commercial | 1 Year Limited |

Dimensions and Weights

| | |
|--------------------------|--------------|
| Length in (mm) | 48.5 (1232) |
| Width in (mm) | 31 (787) |
| Height in (mm) | 39.5 (1003) |
| Carton Length in (mm) | 50 (1267) |
| Carton Width in (mm) | 23 (584) |
| Carton Height in (mm) | 44.25 (1125) |
| Unit Weight lbs (kg) | 390 (177) |
| Shipping Weight lbs (kg) | 513 (233) |

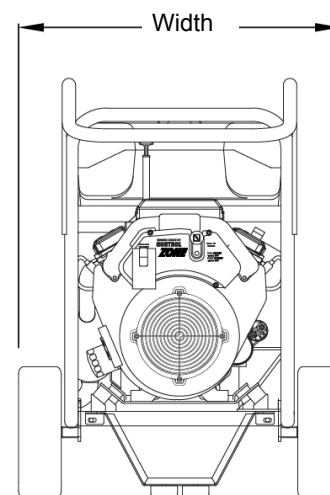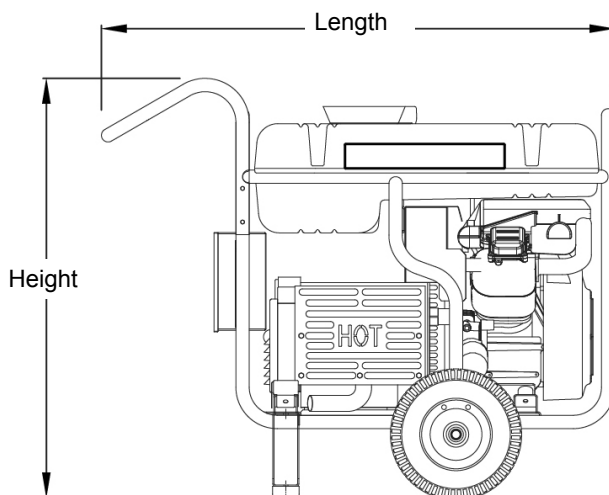

GP5500

GP SERIES Commercial/Residential Portable Generators

Features

- **The Generac OHV engine** with splash lubrication provides a long engine life.
- **Large-capacity steel fuel tank** with incorporated fuel gauge provides durability and extended run times.
- **Low-oil level shutdown** automatically safeguards engine from damage.
- **Hardened 1 1/4" steel tube cradle** for added durability and strength.
- **Fold-down, locking handle** for sturdy portability and compact storage.
- **Hour Meter** tracks maintenance intervals.
- **Heavy-duty, never flat wheels** for reliable portability.
- **Covered outlets** provides added protection from the environment and rugged working conditions.

Models 5939-5 / 5939-6 UPC: 696471059397 (49ST)


Model 5975-2 UPC: 696471059755 (49ST/Canada)

Model 5945-1 UPC: 696471059458 (California)



AC Rated Output Running Watts 5500
AC Maximum Output Starting Watts 6875

49-State Control Panel

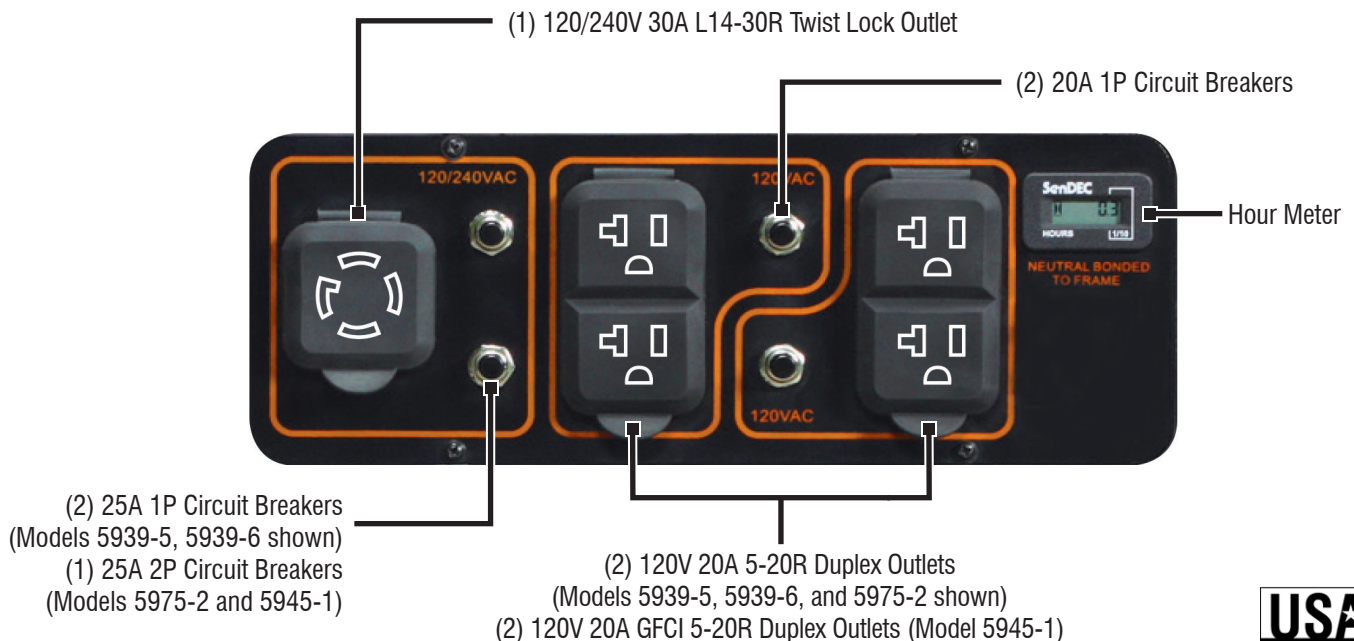

GP5500



specifications

| | |
|---|--|
| Product Series | GP5500 |
| Model (Configuration) | 5939-5 / 5939-6 (EPA) 5975-2 (EPA/CSA) 5945-1 (EPA/CARB) |
| AC Rated Output Running Watts: | 5500 |
| AC Maximum Output Motor Starting Watts: | 6875 |
| AC Voltage | 120/240 VAC |
| AC Frequency | 60 Hz |
| Rated VAC Amperage | 45.8/22.9 |
| Max Rated VAC Amperage | 57.3/28.6 |
| Engine Displacement | 389cc |
| Engine Type | OHV |
| Engine RPM | 3600 |
| Recommended Oil | 10W-30 / SAE30 |
| Lubrication Method | Splash |
| Automatic Voltage Regulation (AVR) | Yes |
| Choke Location | On Engine |
| Fuel Shut Off | On Fuel Tank |
| Starting Method | Recoil Pull Start |
| Low Oil Shutdown Method | Low Level |
| Neutral Bonded to Ground | Yes |

| | |
|------------------------------|--------------------------|
| Start Switch Type | On/Off Switch |
| Switch Location | On Engine |
| Fuel Gauge | Built-In Tank |
| Fuel Tank Capacity Gal (Ltr) | 7.2 (27.3) |
| Run Time at 50% (Hours) | 10 |
| Handle Style | Single Folding / Locking |
| Wheel Type | 9.5" Solid Wheels |
| Maintenance Kit | Sold Separately |
| Warranty - Residential | 2 Year Ltd |
| Warranty - Commercial | 1 Year Ltd |

Dimensions and Weights

| | Models 5939-5 / 5939-6 | Model 5975-2 | Model 5945-1 |
|--------------------------|---------------------------|--------------|--------------|
| Length in (mm) | 27.25 (692) | | |
| Width in (mm) | 27 (687) | | |
| Height in (mm) | 25 (638) | | |
| Extended Length in (mm) | 44.5 (1129) | | |
| Carton Length in (mm) | 31 (790) | | |
| Carton Width in (mm) | 21.5 (550) | | |
| Carton Height in (mm) | 23.25 (590) | | |
| Unit Weight lbs (kg) | 170.9 (81.3) / 171 (77.5) | 170.9 (81.3) | |
| Shipping Weight lbs (kg) | 193 (87.4) | | |

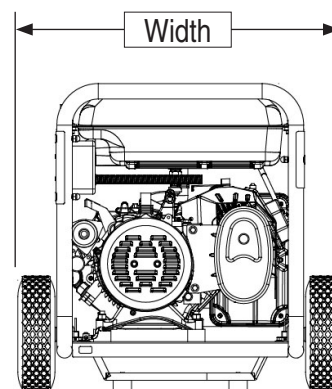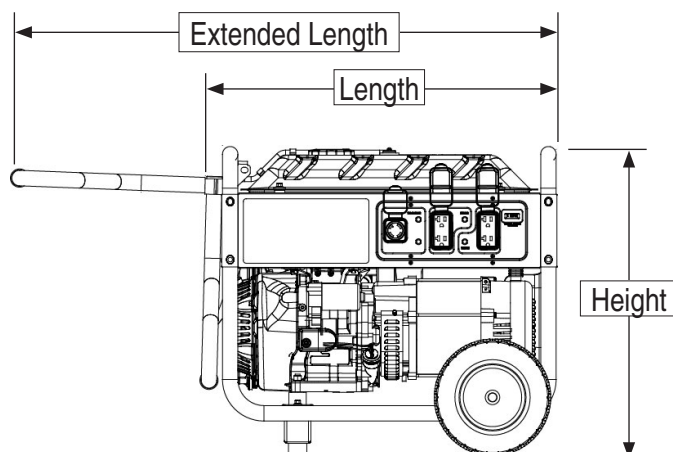

Generac Power Systems, Inc. • P.O. Box 8, Waukesha, WI 53187 • generac.com

©2013 Generac Power Systems, Inc. All rights reserved. All specifications are subject to change without notice. Bulletin 0196610-A / Printed in U.S.A. 09/23/13

GP1800

GP SERIES
Commercial/Residential
Portable Generators

1 of 2

Features


- **The Generac OHV engine** incorporates splash lubrication and provides long life.
- **Large-capacity steel fuel tank** with incorporated fuel gauge provides durability and extended run times.
- **Low-oil level shutdown** automatically safeguards engine from damage.
- **Hardened steel tube cradle** for added strength and durability.

Model 5981-2 UPC: 696471059816 EPA/49-State/CSA



AC Rated Output Running Watts 1800
AC Maximum Output Starting Watts 2050

49-State/CSA Control Panel

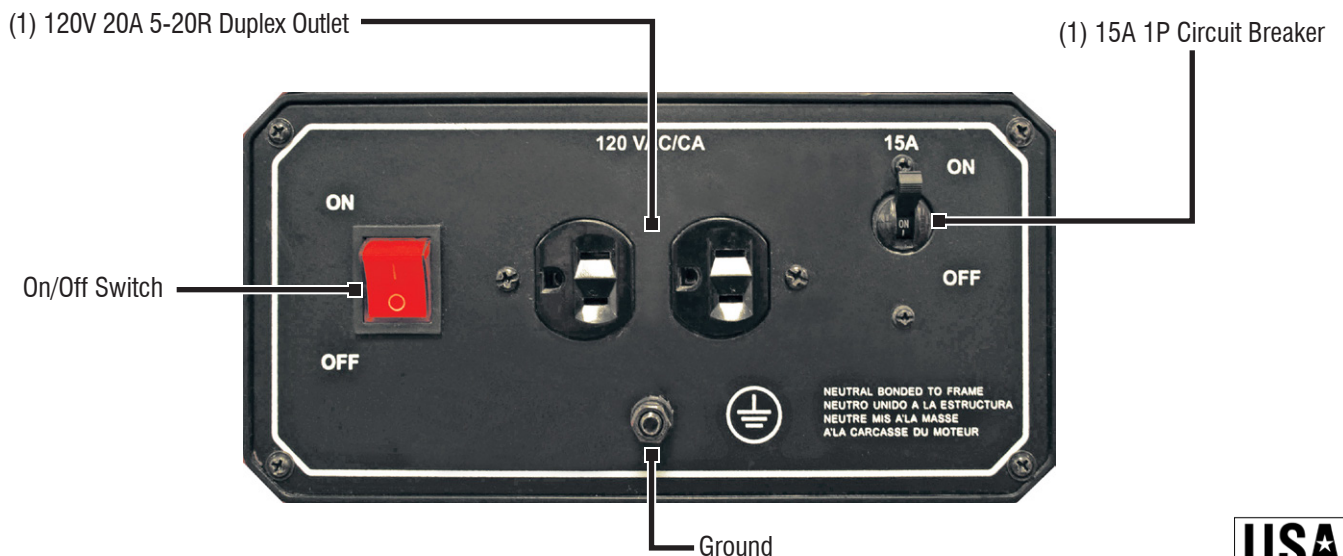

GP1800



Specifications

| | |
|---|-------------------|
| Product Series | GP1800 |
| Model | 5981-2 |
| Configuration/Emissions | EPA/49-State/CSA |
| AC Rated Output Running Watts: | 1800 |
| AC Maximum Output Motor Starting Watts: | 2050 |
| AC Voltage | 120VAC |
| AC Frequency | 60 Hz |
| Rated VAC Amperage | 15 |
| Max Rated VAC Amperage | 17.08 |
| Engine Displacement | 163cc |
| Engine Type | OHV |
| Engine RPM | 3600 |
| Recommended Oil | 10W-30 / SAE30 |
| Lubrication Method | Splash |
| Automatic Voltage Regulation (AVR) | Yes |
| Choke Location | On Engine |
| Fuel Shut Off | On Fuel Tank |
| Starting Method | Recoil Pull Start |
| Low Oil Shutdown Method | Low Level |
| Neutral Bonded to Ground | Yes |

| | |
|-------------------------------|------------------|
| Start Switch Type | On/Off Switch |
| Switch Location | On Control Panel |
| Fuel Gauge | Built-In Tank |
| Fuel Tank Capacity Gal (Ltrs) | 3.5 (13.3) |
| Run Time at 50% (Hours) | 10.5 |
| Maintenance Kit | Sold Separately |
| Warranty - Residential | 2 Year Ltd |
| Warranty - Commercial | 1 Year Ltd |

Dimensions and Weights

| | |
|--------------------------|-------------|
| Length in (mm) | 22.75 (580) |
| Width in (mm) | 16.75 (430) |
| Height in (mm) | 17.25 (438) |
| Carton Length in (mm) | 23.25 (590) |
| Carton Width in (mm) | 17.25 (440) |
| Carton Height in (mm) | 17.75 (453) |
| Unit Weight lbs (kg) | 84 (38) |
| Shipping Weight lbs (kg) | 88 (40) |

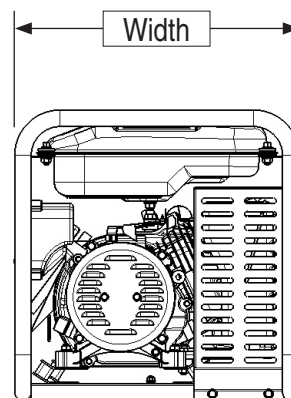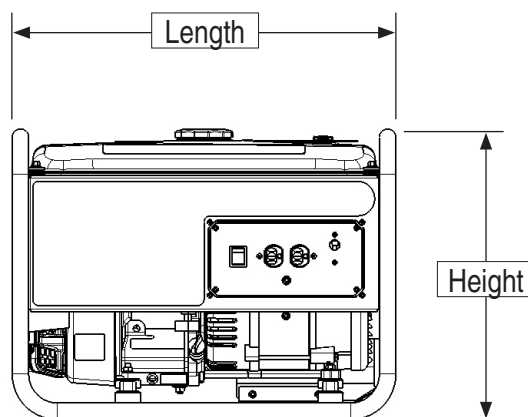

GP8000E

GP SERIES Commercial/Residential Portable Generators

Features

- **The Generac OHV engine** with splash lubrication provides a long engine life.
- **Single touch electric start**, battery included, provides hassle-free start-up.
- **Hour Meter** tracks maintenance intervals.
- **Large-capacity steel fuel tank** with incorporated fuel gauge provides durability and extended run times.
- **Low-oil level shutdown** automatically safeguards engine from damage.
- **Covered outlets** provides added protection from the environment and rugged working conditions.
- **Hardened 1 1/4" steel tube cradle** for added durability and strength.
- **Fold-down, locking handle** for sturdy portability and compact storage.
- **Heavy-duty, never flat wheels** for reliable portability.
- **Plug-in battery charger jack** keeps battery charged and ready to go.


Model 6954-0 UPC: 696471069549 (49ST/CSA)



Photograph may not represent actual content.

AC Rated Output Running Watts 8000
AC Maximum Output Starting Watts 10000

49-State/CSA Control Panel

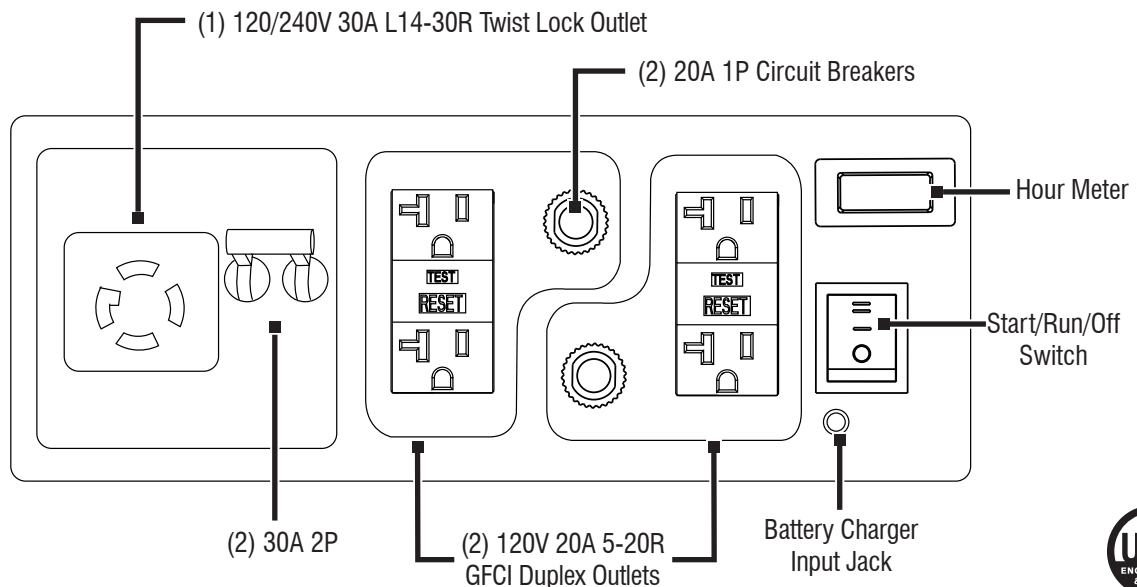

GP8000E

Specifications

| | |
|---|----------------------------|
| Product Series | GP8000E |
| Model (Configuration) | 6954-0 (49 ST / CSA) |
| AC Rated Output Running Watts: | 8000 |
| AC Maximum Output Motor Starting Watts: | 10000 |
| AC Voltage | 120/240 VAC |
| AC Frequency | 60 Hz |
| Rated VAC Amperage | 66.6/33.3 |
| Engine Displacement | 420cc |
| Engine Type | OHV |
| Engine RPM | 3600 |
| Recommended Oil | 10W-30 / SAE30 |
| Lubrication Method | Splash |
| Automatic Voltage Regulation (AVR) | Yes |
| Choke Location | On Engine |
| Fuel Shut Off | On Fuel Tank |
| Starting Method | Electric/Recoil Pull Start |
| Low Oil Shutdown Method | Low Level |
| Battery Type | 12VDC, 10AH |
| Battery Charger Input Jack | Included |
| Neutral Bonded to Ground | Yes |
| Start Switch Type | Start/Run/Off Switch |
| Start Switch Location | On Control Panel |

| | |
|------------------------------|--------------------------|
| Fuel Gauge | Built-In Tank |
| Fuel Tank Capacity Gal (Ltr) | 7.5 (28.4) |
| Run Time at 50% (Hours) | 9.5 |
| Handle Style | Single Folding / Locking |
| Wheel Type | 9.5" Solid Wheels |
| Maintenance Kit | Sold Separately |
| Warranty - Residential | 2 Year Ltd |
| Warranty - Commercial | 1 Year Ltd |

Dimensions and Weights

| | Model 6954-0 |
|--------------------------|--------------|
| Length in (mm) | 28.8 (733) |
| Width in (mm) | 27.25 (692) |
| Height in (mm) | 25.75 (654) |
| Extended Length in (mm) | 45.38 (1152) |
| Carton Length in (mm) | 31 (790) |
| Carton Width in (mm) | 22.12 (562) |
| Carton Height in (mm) | 24 (610) |
| Unit Weight lbs (kg) | 197 (89.4) |
| Shipping Weight lbs (kg) | 220.3 (100) |

