

product specifications for:
CLS Series 16 Inline Cams

Item #: CLS2MB

Description

MALE CLS SERIES 16 INLINE #6 - #2 AWG

Electrical Specifications

Max. Amperage: 190A with #2 AWG

Max. Voltage: 600V AC/DC

Material Specifications

Housing Material: Santoprene TPV

Contact Material: Brass

Temperature Rating: -40°C to 105°C

Mechanical Specification



Gender: Male

Connection Type: Double Set Screw

(Torque to 160 in-lbs.)

Retaining Screw: Glass Filled / Heat Stabilized Nylon

Example: CLS2MB + **A** = CLS2MB-A

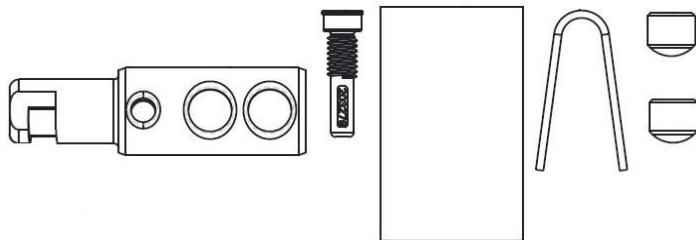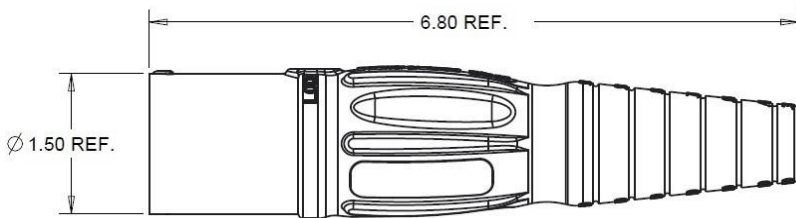


Standards and Certifications

UL Listed: File E471676

CSA Certified: 0812900000

Environmental Rating: Type 3R & 4

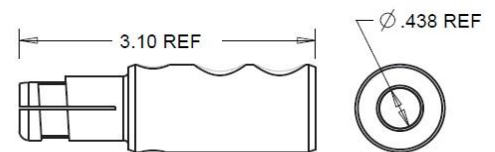

SHOWN FOR SIZING

product specifications for: CLS Series 16 Inline Cams

Item #: CLS20FB

Description

FEMALE CLS SERIES 16 INLINE #2 - 2/0 AWG

Electrical Specifications

Max. Amperage: 300A with 2/0 AWG

Max. Voltage: 600V AC/DC

Material Specifications

Housing Material: Santoprene TPV

Contact Material: Brass

Temperature Rating: -40°C to 105°C

Mechanical Specification

Gender: Female

Connection Type: Double Set Screw

(Torque to 160 in-lbs.)

Retaining Screw: Glass Filled / Heat Stabilized Nylon

Example: CLS20FB + **A** = CLS20FB-A





Standards and Certifications


UL Listed: File E471676

CSA Certified: 0812900000

Environmental Rating: Type 3R & 4

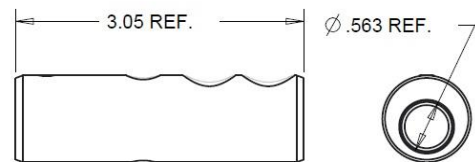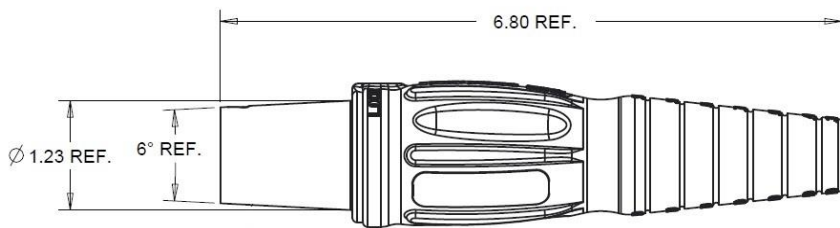

SHOWN FOR SIZING

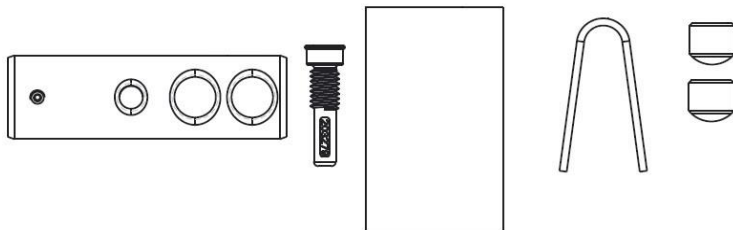

toll free 800.307.6702 | marincopowerproducts.com

©2015 Marincó Power Products. All rights reserved.

MARINCO
power products

product specifications for: CLS Series 16 Inline Cams

Item #: CLS40MB

Description
MALE CLS SERIES 16 INLINE 2/0 - 4/0 AWG

Electrical Specifications
Max. Amperage: 400A with 4/0 AWG
Max. Voltage: 600V AC/DC



Material Specifications
Housing Material: Santoprene TPV
Contact Material: Brass
Temperature Rating: -40°C to 105°C

Mechanical Specification
Gender: Male
Connection Type: Double Set Screw
(Torque to 160 in-lbs.)
Retaining Screw: Glass Filled / Heat Stabilized Nylon

Example: CLS40MB + **A** = CLS40MB-A



Standards and Certifications
UL Listed: File E471676
CSA Certified: 0812900000
Environmental Rating: Type 3R & 4

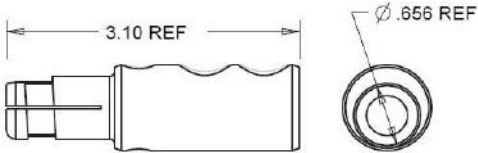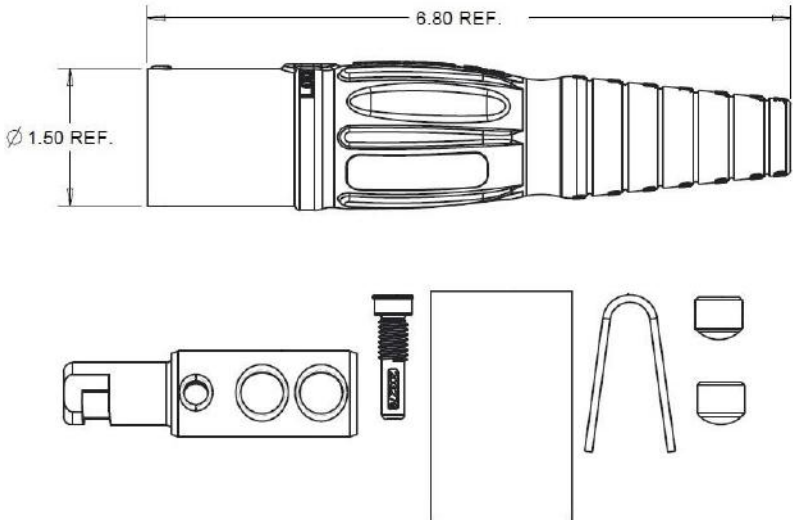

SHOWN FOR SIZING

