










INNOVATIVE POWER SOLUTIONS

# CAM Lock Panels



| CAM Type  |   | Termination Type  |   | NEMA 3R  |   |   |
|---|---|---|---|--|---|---|
| <br>45° |  |  |  |  |  |  |
|   | 90°   | Threaded Post   | Double Set Screw  | Clear Snap Back Cov-   | Cap & Lanyard   | Blank   |

## Features and Benefits



CAM Panels are shipped pre-assembled reducing labor time and costs for installation – no more cutting individual holes for panel-mounted CAMS



High density configuration allows more connections per sq/ft



Standard panel configurations offered to meet most temporary power applications



1/8" powder coated aluminum is non-ferrous and minimizes eddy currents




Custom designs and configurations are quickly produced to meet your specific requirements



- Amperage: 400
- Positions: 4
- Gender: Male/Female
- Note: 4 hole position CAM Panels contain 4 CAMs with 5 positions

| Product Number*  | Amps | Voltage          | Holes | CAM Type    | CAM Angle | Connection Type             | Caps              |
|------------------|------|------------------|-------|-------------|-----------|-----------------------------|-------------------|
| PNL04ACDE45DSMCL | 400  | 3 Phase 250 Volt | 4     | Male/Female | 45 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL04ACDE45TPMCL | 400  | 3 Phase 250 Volt | 4     | Male/Female | 45 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL04ACDE90DSMCL | 400  | 3 Phase 250 Volt | 4     | Male/Female | 90 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL04ACDE90DSMCS | 400  | 3 Phase 250 Volt | 4     | Male/Female | 90 degree | Double Set-Screw connection | Clear-Snap Cover  |
| PNL04ACDE90TPMCL | 400  | 3 Phase 250 Volt | 4     | Male/Female | 90 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL04ACDE90TPMCS | 400  | 3 Phase 250 Volt | 4     | Male/Female | 90 degree | Threaded Post Connection    | Clear-Snap Cover  |
| PNL04FGHE45DSMCL | 400  | 3 Phase 480 Volt | 4     | Male/Female | 45 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL04FGHE45TPMCL | 400  | 3 Phase 480 Volt | 4     | Male/Female | 45 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL04FGHE90DSMCL | 400  | 3 Phase 480 Volt | 4     | Male/Female | 90 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL04FGHE90DSMCS | 400  | 3 Phase 480 Volt | 4     | Male/Female | 90 degree | Double Set-Screw connection | Clear-Snap Cover  |
| PNL04FGHE90TPMCL | 400  | 3 Phase 480 Volt | 4     | Male/Female | 90 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL04FGHE90TPMCS | 400  | 3 Phase 480 Volt | 4     | Male/Female | 90 degree | Threaded Post Connection    | Clear-Snap Cover  |

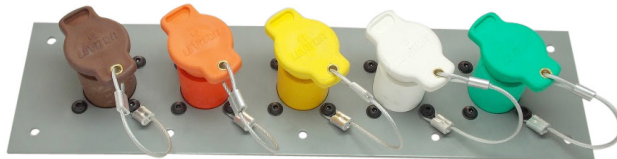

- Amperage: 400
- Positions: 5
- Gender: Male/Female

| Product Number*   | Amps | Voltage             | Holes | CAM Type    | CAM Angle | Connection Type             | Caps              |
|-------------------|------|---------------------|-------|-------------|-----------|-----------------------------|-------------------|
| PNL05ACDBE45DSMCL | 400  | 3Phase 120/208 Volt | 5     | Male/Female | 45 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL05ACDBE45TPMCL | 400  | 3Phase 120/208 Volt | 5     | Male/Female | 45 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL05ACDBE90DSMCL | 400  | 3Phase 120/208 Volt | 5     | Male/Female | 90 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL05ACDBE90DSMCS | 400  | 3Phase 120/208 Volt | 5     | Male/Female | 90 degree | Double Set-Screw connection | Clear-Snap Cover  |
| PNL05ACDBE90TPMCL | 400  | 3Phase 120/208 Volt | 5     | Male/Female | 90 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL05ACDBE90TPMCS | 400  | 3Phase 120/208 Volt | 5     | Male/Female | 90 degree | Threaded Post Connection    | Clear-Snap Cover  |
| PNL05FGHBE45DSMCL | 400  | 3Phase 277/480 Volt | 5     | Male/Female | 45 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL05FGHBE45TPMCL | 400  | 3Phase 277/480 Volt | 5     | Male/Female | 45 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL05FGHBE90DSMCL | 400  | 3Phase 277/480 Volt | 5     | Male/Female | 90 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL05FGHBE90DSMCS | 400  | 3Phase 277/480 Volt | 5     | Male/Female | 90 degree | Double Set-Screw connection | Clear-Snap Cover  |
| PNL05FGHBE90TPMCL | 400  | 3Phase 277/480 Volt | 5     | Male/Female | 90 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL05FGHBE90TPMCS | 400  | 3Phase 277/480 Volt | 5     | Male/Female | 90 degree | Threaded Post Connection    | Clear-Snap Cover  |



- Amperage: 800
- Positions: 8
- Gender: Male/Female
- Note: 8 hole position CAM Panels contain 8 CAMs with 10 panel holes

| Product Number*  | Amps | Voltage          | Holes* | CAM Type    | CAM Angle | Connection Type             | Caps              |
|------------------|------|------------------|--------|-------------|-----------|-----------------------------|-------------------|
| PNL08ACDE45DSMCL | 800  | 3 Phase 250 Volt | 8(10)  | Male/Female | 45 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL08ACDE45TPMCL | 800  | 3 Phase 250 Volt | 8(10)  | Male/Female | 45 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL08ACDE90DSMCL | 800  | 3 Phase 250 Volt | 8(10)  | Male/Female | 90 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL08ACDE90DSMCS | 800  | 3 Phase 250 Volt | 8(10)  | Male/Female | 90 degree | Double Set-Screw connection | Clear-Snap Cover  |
| PNL08ACDE90TPMCL | 800  | 3 Phase 250 Volt | 8(10)  | Male/Female | 90 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL08ACDE90TPMCS | 800  | 3 Phase 250 Volt | 8(10)  | Male/Female | 90 degree | Threaded Post Connection    | Clear-Snap Cover  |
| PNL08FGHE45DSMCL | 800  | 3 Phase 480 Volt | 8(10)  | Male/Female | 45 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL08FGHE45TPMCL | 800  | 3 Phase 480 Volt | 8(10)  | Male/Female | 45 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL08FGHE90DSMCL | 800  | 3 Phase 480 Volt | 8(10)  | Male/Female | 90 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL08FGHE90DSMCS | 800  | 3 Phase 480 Volt | 8(10)  | Male/Female | 90 degree | Double Set-Screw connection | Clear-Snap Cover  |
| PNL08FGHE90TPMCL | 800  | 3 Phase 480 Volt | 8(10)  | Male/Female | 90 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL08FGHE90TPMCS | 800  | 3 Phase 480 Volt | 8(10)  | Male/Female | 90 degree | Threaded Post Connection    | Clear-Snap Cover  |




- Amperage: 800
- Positions: 10
- Gender: Male/Female

| Product Number*   | Amps | Voltage             | Holes | CAM Type    | CAM Angle | Connection Type             | Caps              |
|-------------------|------|---------------------|-------|-------------|-----------|-----------------------------|-------------------|
| PNL10ACDBE45DSMCL | 800  | 3Phase 120/208 Volt | 10    | Male/Female | 45 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL10ACDBE45TPMCL | 800  | 3Phase 120/208 Volt | 10    | Male/Female | 45 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL10ACDBE90DSMCL | 800  | 3Phase 120/208 Volt | 10    | Male/Female | 90 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL10ACDBE90DSMCS | 800  | 3Phase 120/208 Volt | 10    | Male/Female | 90 degree | Double Set-Screw connection | Clear-Snap Cover  |
| PNL10ACDBE90TPMCL | 800  | 3Phase 120/208 Volt | 10    | Male/Female | 90 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL10ACDBE90TPMCS | 800  | 3Phase 120/208 Volt | 10    | Male/Female | 90 degree | Threaded Post Connection    | Clear-Snap Cover  |
| PNL10FGHBE45DSMCL | 800  | 3Phase 277/480 Volt | 10    | Male/Female | 45 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL10FGHBE45TPMCL | 800  | 3Phase 277/480 Volt | 10    | Male/Female | 45 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL10FGHBE90DSMCL | 800  | 3Phase 277/480 Volt | 10    | Male/Female | 90 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL10FGHBE90DSMCS | 800  | 3Phase 277/480 Volt | 10    | Male/Female | 90 degree | Double Set-Screw connection | Clear-Snap Cover  |
| PNL10FGHBE90TPMCL | 800  | 3Phase 277/480 Volt | 10    | Male/Female | 90 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL10FGHBE90TPMCS | 800  | 3Phase 277/480 Volt | 10    | Male/Female | 90 degree | Threaded Post Connection    | Clear-Snap Cover  |




- Amperage:1200
- Positions: 15
- Gender: Male/Female

| Product Number*   | Amps | Voltage             | Holes | CAM Type    | CAM Angle | Connection Type             | Caps              |
|-------------------|------|---------------------|-------|-------------|-----------|-----------------------------|-------------------|
| PNL15ACDBE45DSMCL | 1200 | 3Phase 120/208 Volt | 15    | Male/Female | 45 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL15ACDBE45TPMCL | 1200 | 3Phase 120/208 Volt | 15    | Male/Female | 45 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL15ACDBE90DSMCL | 1200 | 3Phase 120/208 Volt | 15    | Male/Female | 90 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL15ACDBE90DSMCS | 1200 | 3Phase 120/208 Volt | 15    | Male/Female | 90 degree | Double Set-Screw connection | Clear-Snap Cover  |
| PNL15ACDBE90TPMCL | 1200 | 3Phase 120/208 Volt | 15    | Male/Female | 90 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL15ACDBE90TPMCS | 1200 | 3Phase 120/208 Volt | 15    | Male/Female | 90 degree | Threaded Post Connection    | Clear-Snap Cover  |
| PNL15FGHBE45DSMCL | 1200 | 3Phase 277/480 Volt | 15    | Male/Female | 45 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL15FGHBE45TPMCL | 1200 | 3Phase 277/480 Volt | 15    | Male/Female | 45 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL15FGHBE90DSMCL | 1200 | 3Phase 277/480 Volt | 15    | Male/Female | 90 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL15FGHBE90DSMCS | 1200 | 3Phase 277/480 Volt | 15    | Male/Female | 90 degree | Double Set-Screw connection | Clear-Snap Cover  |
| PNL15FGHBE90TPMCL | 1200 | 3Phase 277/480 Volt | 15    | Male/Female | 90 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL15FGHBE90TPMCS | 1200 | 3Phase 277/480 Volt | 15    | Male/Female | 90 degree | Threaded Post Connection    | Clear-Snap Cover  |

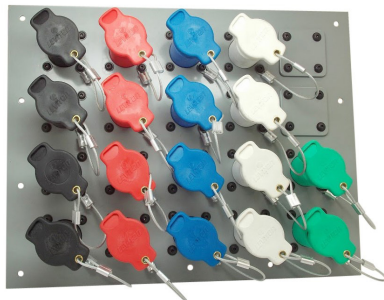

- Amperage: 1600
- Positions: 20 (Picture shows 18)
- Gender: Male/Female

| Product Number*   | Amps | Voltage             | Holes | CAM Type    | CAM Angle | Connection Type             | Caps              |
|-------------------|------|---------------------|-------|-------------|-----------|-----------------------------|-------------------|
| PNL20ACDBE45DSMCL | 1600 | 3Phase 120/208 Volt | 20    | Male/Female | 45 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL20ACDBE45TPMCL | 1600 | 3Phase 120/208 Volt | 20    | Male/Female | 45 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL20ACDBE90DSMCL | 1600 | 3Phase 120/208 Volt | 20    | Male/Female | 90 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL20ACDBE90DSMCS | 1600 | 3Phase 120/208 Volt | 20    | Male/Female | 90 degree | Double Set-Screw connection | Clear-Snap Cover  |
| PNL20ACDBE90TPMCL | 1600 | 3Phase 120/208 Volt | 20    | Male/Female | 90 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL20ACDBE90TPMCS | 1600 | 3Phase 120/208 Volt | 20    | Male/Female | 90 degree | Threaded Post Connection    | Clear-Snap Cover  |
| PNL20FGHBE45DSMCL | 1600 | 3Phase 277/480 Volt | 20    | Male/Female | 45 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL20FGHBE45TPMCL | 1600 | 3Phase 277/480 Volt | 20    | Male/Female | 45 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL20FGHBE90DSMCL | 1600 | 3Phase 277/480 Volt | 20    | Male/Female | 90 degree | Double Set-Screw connection | Caps and Lanyards |
| PNL20FGHBE90DSMCS | 1600 | 3Phase 277/480 Volt | 20    | Male/Female | 90 degree | Double Set-Screw connection | Clear-Snap Cover  |
| PNL20FGHBE90TPMCL | 1600 | 3Phase 277/480 Volt | 20    | Male/Female | 90 degree | Threaded Post Connection    | Caps and Lanyards |
| PNL20FGHBE90TPMCS | 1600 | 3Phase 277/480 Volt | 20    | Male/Female | 90 degree | Threaded Post Connection    | Clear-Snap Cover  |

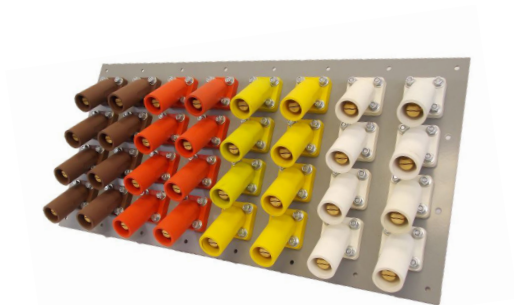

- Amperage: 3200
- Positions: 32
- Gender: Male/Female

| Part Number       | Amps | Voltage       | Holes | CAM Type | CAM Angle | Connection Type  | Caps            |
|-------------------|------|---------------|-------|----------|-----------|------------------|-----------------|
| PNL32ACDE45DSMCL  | 3200 | 3 Phase 250 V | 32    | Male     | 45 degree | Double Set Screw | Cap & Lanyard   |
| PNL32ACDE45TPMCL  | 3200 | 3 Phase 250 V | 32    | Male     | 45 degree | Threaded Post    | Cap & Lanyard   |
| PNL32ACDE90DS MCL | 3200 | 3 Phase 250 V | 32    | Male     | 90 degree | Double Set Screw | Cap & Lanyard   |
| PNL32ACDE90DS MCS | 3200 | 3 Phase 250 V | 32    | Male     | 90 degree | Double Set Screw | Clear Snap Back |
| PNL32ACDE90TPMCL  | 3200 | 3 Phase 250 V | 32    | Male     | 90 degree | Threaded Post    | Cap & Lanyard   |
| PNL32ACDE90TPMCS  | 3200 | 3 Phase 250 V | 32    | Male     | 90 degree | Threaded Post    | Clear Snap Back |
| PNL32FGHE45DS MCL | 3200 | 3 Phase 480 V | 32    | Male     | 45 degree | Double Set Screw | Cap & Lanyard   |
| PNL32FGHE45TPMCL  | 3200 | 3 Phase 480 V | 32    | Male     | 45 degree | Threaded Post    | Cap & Lanyard   |
| PNL32FGHE90DS MCL | 3200 | 3 Phase 480 V | 32    | Male     | 90 degree | Double Set Screw | Cap & Lanyard   |
| PNL32FGHE90DS MCS | 3200 | 3 Phase 480 V | 32    | Male     | 90 degree | Double Set Screw | Clear Snap Back |
| PNL32FGHE90TPMCL  | 3200 | 3 Phase 480 V | 32    | Male     | 90 degree | Threaded Post    | Cap & Lanyard   |
| PNL32FGHE90TPMCS  | 3200 | 3 Phase 480 V | 32    | Male     | 90 degree | Threaded Post    | Clear Snap Back |
| PNL32ACDE45DS FCL | 3200 | 3 Phase 250 V | 32    | Female   | 45 degree | Double Set Screw | Cap & Lanyard   |
| PNL32ACDE45TPFCL  | 3200 | 3 Phase 250 V | 32    | Female   | 45 degree | Threaded Post    | Cap & Lanyard   |
| PNL32ACDE90DS FCL | 3200 | 3 Phase 250 V | 32    | Female   | 90 degree | Double Set Screw | Cap & Lanyard   |
| PNL32ACDE90DS FCS | 3200 | 3 Phase 250 V | 32    | Female   | 90 degree | Double Set Screw | Clear Snap Back |
| PNL32ACDE90TPFCL  | 3200 | 3 Phase 250 V | 32    | Female   | 90 degree | Threaded Post    | Cap & Lanyard   |
| PNL32ACDE90TPFCS  | 3200 | 3 Phase 250 V | 32    | Female   | 90 degree | Threaded Post    | Clear Snap Back |
| PNL32FGHE45DS FCL | 3200 | 3 Phase 480 V | 32    | Female   | 45 degree | Double Set Screw | Cap & Lanyard   |
| PNL32FGHE45TPFCL  | 3200 | 3 Phase 480 V | 32    | Female   | 45 degree | Threaded Post    | Cap & Lanyard   |
| PNL32FGHE90DS FCL | 3200 | 3 Phase 480 V | 32    | Female   | 90 degree | Double Set Screw | Cap & Lanyard   |
| PNL32FGHE90DS FCS | 3200 | 3 Phase 480 V | 32    | Female   | 90 degree | Double Set Screw | Clear Snap Back |
| PNL32FGHE90TPFCL  | 3200 | 3 Phase 480 V | 32    | Female   | 90 degree | Threaded Post    | Cap & Lanyard   |
| PNL32FGHE90TPFCS  | 3200 | 3 Phase 480 V | 32    | Female   | 90 degree | Threaded Post    | Clear Snap Back |