


T3A 3 CONDUCTOR AL/CU



- Manufactured from high strength 6061-T6 aluminum alloy.
- Electro-Tin plated.
- UL 486A/B 90° C Listed and is CSA certified.
- Suitable for use in circuits rated 35KV or less; proper high voltage spacing and insulation techniques must be used.
- Suitable for use with either copper or aluminum conductors.
- Chamfered wire entry provides ease of installation.
- Must be mounted with a minimum of 2 bolts.
- UL File E6207
- * Mounting hole spacing from side to side, hole to hole is .875".

Item ID	Figure Number	Conductor Range	Bolt/Stud Size	Mounting Hole Spacing	Length	Width	Height	Hex Size	Standard Package	NAED/UPC Number
T3A2-2	1	2-14 AWG	5/16	7/8	2.1870	1.5940	0.6250	S	6	0783669896541
T3A2-0	1	1/0-14 AWG	3/8	1	2.9060	1.9380	0.8750	S	6	0783669895902
T3A2-3/0N	1	3/0-6 AWG	1/2	1-3/4	3.8750	2.8130	1.1250	5/16	3	0783669897340
T3A2-250N	1	250 kcmil-6 AWG	1/2	1-3/4	4.0000	2.8130	1.1870	5/16	1	0783669898309
T3A2-350N	1	350 kcmil-6 AWG	1/2	1-3/4	4.3120	3.0000	1.3750	5/16	1	0783669899450
T3A2-600N	* 3	600 kcmil-2 AWG	1/2	1-3/4	5.5000	3.5000	1.5000	1/2	1	0783669900576
T3A2-800N	* 3	800 kcmil-350 kcmil	1/2	1-3/4	5.9700	4.1250	1.8130	5/16	1	0783669900606

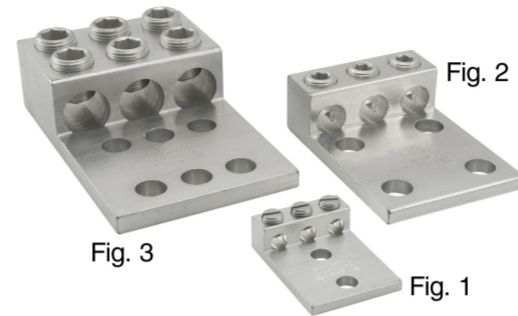

T3A 3 CONDUCTOR AL/CU

Item ID	Figure Number	Conductor Range	Bolt/Stud Size	Mounting Hole Spacing	Length	Width	Height	Hex Size	Standard Package	NAED/UPC Number
T3A2-1000N	* 3	1000 kcmil-500 kcmil	1/2	1-3/4	5.9700	4.8750	1.8130	3/8	1	0783669903133
T3A4-2	2	2-14 AWG	5/16	7/8	2.1870	1.5940	0.6250	S	6	0783669905328
T3A4-0	2	1/0-14 AWG	3/8	1	2.9060	1.9380	0.8750	S	6	0783669904871
T3A4-3/0N	2	3/0-6 AWG	1/2	1-3/4	3.8750	2.8130	1.1250	5/16	3	0783669906042
T3A4-250N	2	250 kcmil-6 AWG	1/2	1-3/4	4.0000	2.8130	1.1880	5/16	1	0783669907193
T3A4-350N	2	350 kcmil-6 AWG	1/2	1-3/4	4.3130	3.0000	1.3750	5/16	1	0783669908237
T3A4-600N	* 3	600 kcmil-2 AWG	1/2	1-3/4	5.5000	3.5000	1.5000	1/2	1	0783669909609
T3A4-800N	* 3	800 kcmil-350 kcmil	1/2	1-3/4	5.9700	4.1250	1.8130	1/2	1	0783669910414
T3A4-1000N	* 3	1000 kcmil-350 kcmil	1/2	1-3/4	5.9700	4.8750	1.8130	1/2	1	0783669911992