


TA 1 CONDUCTOR AL/CU



- Manufactured from high strength 6061-T6 aluminum alloy.
- Electro-Tin plated.
- Suitable for use in circuits rated at 35 KV or less; proper high voltage spacing and insulation techniques must be used.
- Suitable for use with either copper or aluminum conductors.
- Chamfered wire entry provides ease of installation.
- CSA Certified.
- Rated to 90° C.
- UL 486A/B Listed, UL File E6207.
- TA-6-S through TA-500 Listed to UL467, UL File E6207

Figure Number	Conductor Range	Bolt/Stud Size	Mounting Hole Spacing	Length	Width	Height	Hex Size	Standard Package	Item ID	NAED/UPC Number
1	4-14 AWG	1/4		1.0625	0.5000	0.5000	S	100	TA-6-S	0783669888386
	2-14 AWG or (2) 10-14 CU or (2)	1/4		1.1563	0.5000	0.5500	S	100	TA-2	0783669887747
	1/0-14 AWG or (2) 4-12 AWG	1/4		1.4688	0.6250	0.7940	S	50	TA-0	0783669887150
2	2/0-14 AWG	1/4		1.4688	0.6250	0.7940	3/16	50	TA-2/0	0783669177497
	250 kcmil-6 AWG	5/16		1.9840	0.9900	1.1220	5/16	25	TA-250	0783669889420
	300 kcmil-6 AWG	1/4		1.9840	0.8530	1.1220	5/16	25	TA-300	0783669187410
	350 kcmil-6 AWG	3/8		2.2500	1.1250	1.2500	3/8	25	TA-350	0783669889932

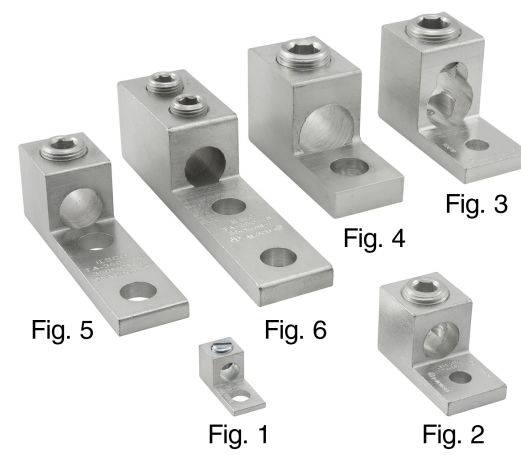

TA 1 CONDUCTOR AL/CU

Figure Number	Conductor Range	Bolt/Stud Size	Mounting Hole Spacing	Length	Width	Height	Hex Size	Standard Package	Item ID	NAED/UPC Number
5	350 kcmil-6 AWG	1/2	1-3/4	4.3125	1.1250	1.3750	3/8	6	TA-350-2NS	0783669892222
6	350 kcmil-6 AWG	1/2	1-3/4	5.5000	1.2500	1.5000	(2)3/8	6	TA-350-2N	0783669892239
2	500 kcmil-4 AWG	3/8		2.8125	1.5000	1.5620	1/2	12	TA-500	0783669891010
3	(1) 600 kcmil-4 AWG or (2)	3/8		2.8125	1.3125	1.8120	1/2	6	TA-500-S	0783669891447
2	600 kcmil-2 AWG	3/8		3.1875	1.5000	1.5630	1/2	12	TA-600	0783669892161
5	600 kcmil-2 AWG	1/2	1-3/4	4.6875	1.5000	1.5630	1/2	3	TA-600-2NS	0783669892178
6	600 kcmil-2 AWG	1/2	1-3/4	5.5000	1.3750	1.5000	(2)1/2	3	TA-600-2N	0783669892253
2	800 kcmil-300 kcmil	5/8		3.3750	1.7500	1.9380	1/2	3	TA-800	0783669893205
4	800 kcmil-3/0 AWG	5/8		3.2500	1.3125	1.8120	1/2	3	TA-800-S	0783669893120
5	800 kcmil-300 kcmil	1/2	1-3/4	4.7500	1.7500	1.9380	1/2	3	TA-800-2NS	0783669892185
6	800 kcmil-300 kcmil	1/2	1-3/4	5.9700	1.5000	1.8130	(2) 3/8	3	TA-800-2N	0783669893403
2	1000 kcmil-350 kcmil	5/8		3.3750	1.7500	1.9380	9/16	3	TA-1000	0783669895582
4	1000 kcmil-500 kcmil	5/8		3.2500	1.4375	1.8120	9/16	3	TA-1000-S	0783669895667
5	1000 kcmil-500 kcmil	1/2	1-3/4	4.7500	1.7500	1.9380	9/16	3	TA-1000-2NS	0783669892192
6	1000 kcmil-350 kcmil	1/2	1-3/4	5.9700	1.6250	1.8130	(2) 3/8	3	TA-1000-2N	0783669894868